



Page 1 of 4

Beam details

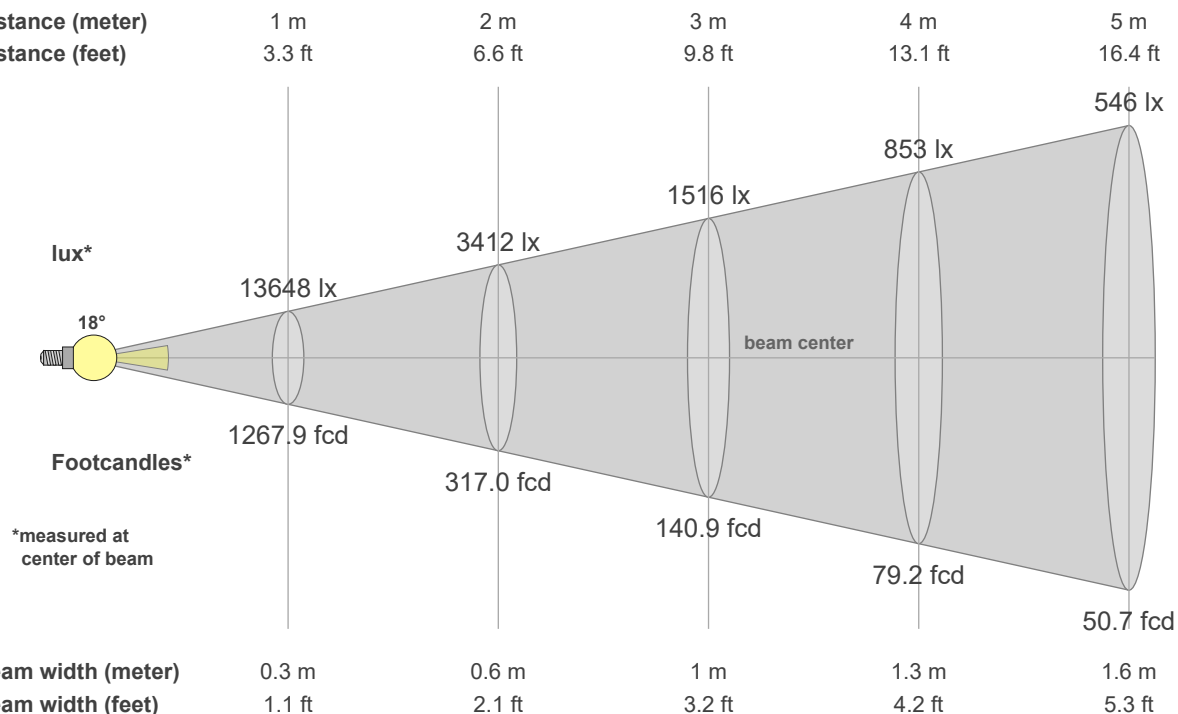


Luminaire budgetary diagram


LAMPS (number of lamps)

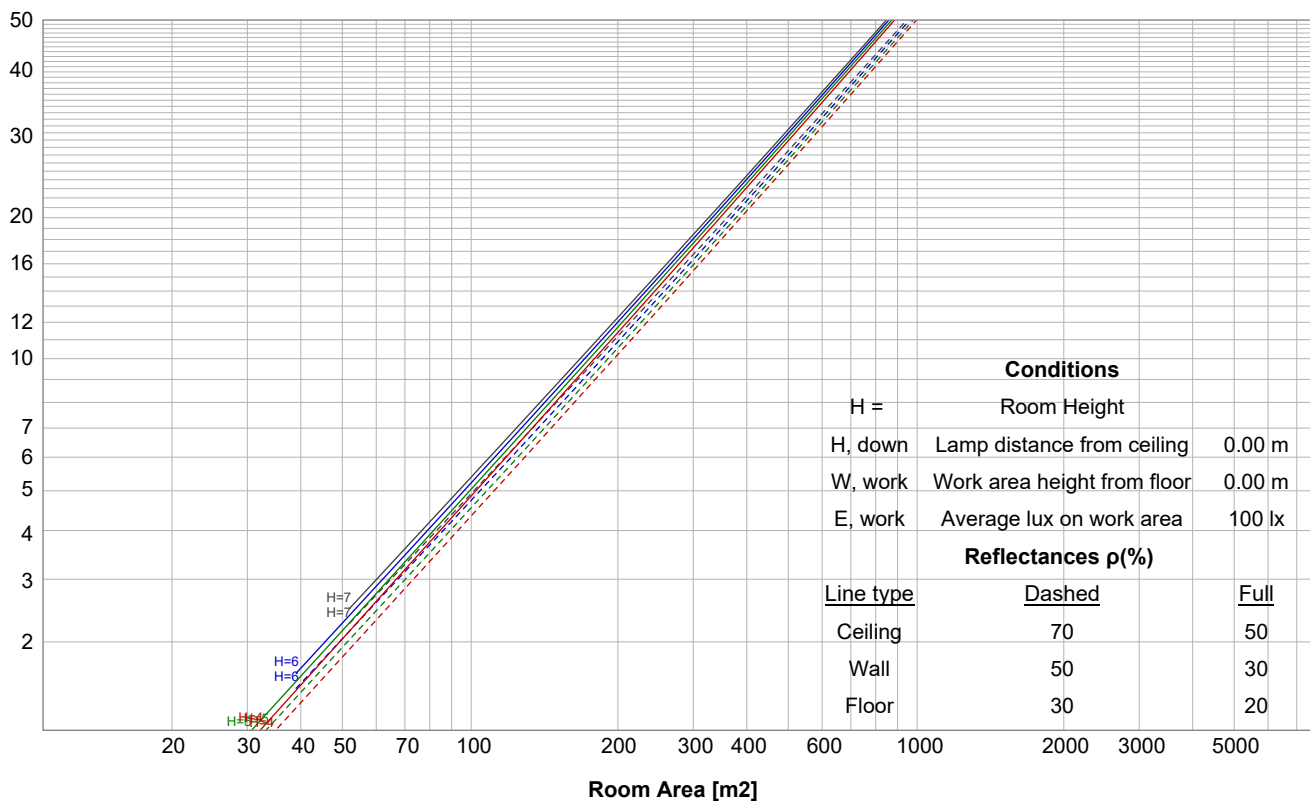


Iso-intensity Diagram (Iso-candela)

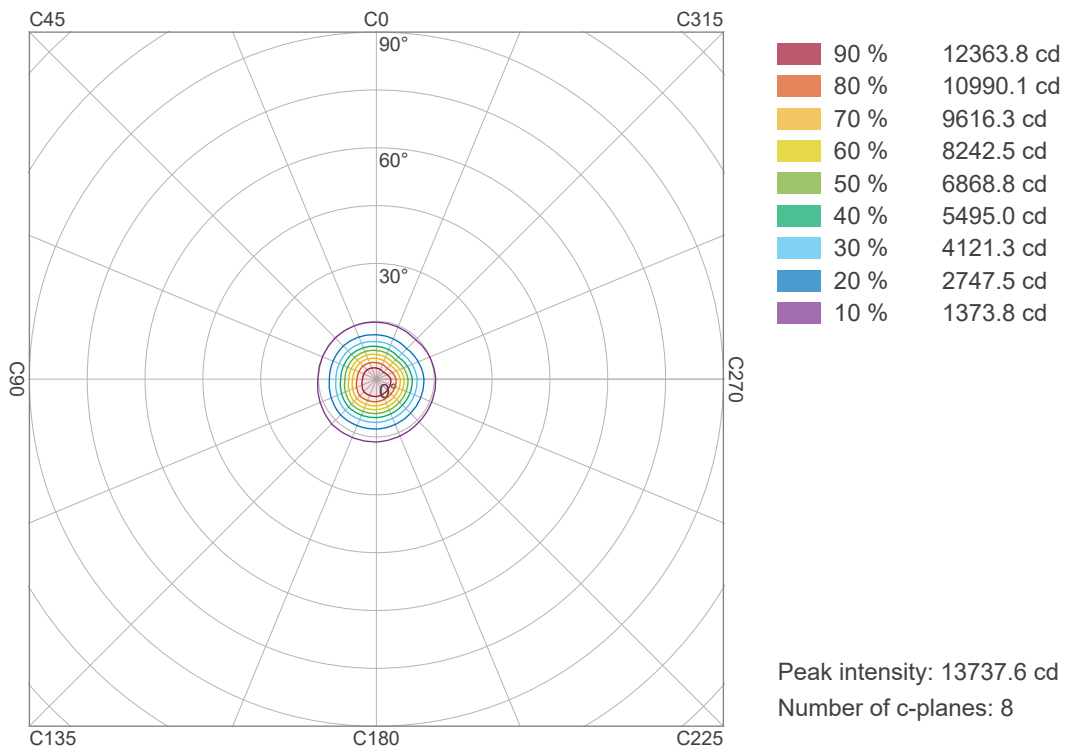

Iso-illuminance Diagram (Iso-lux)

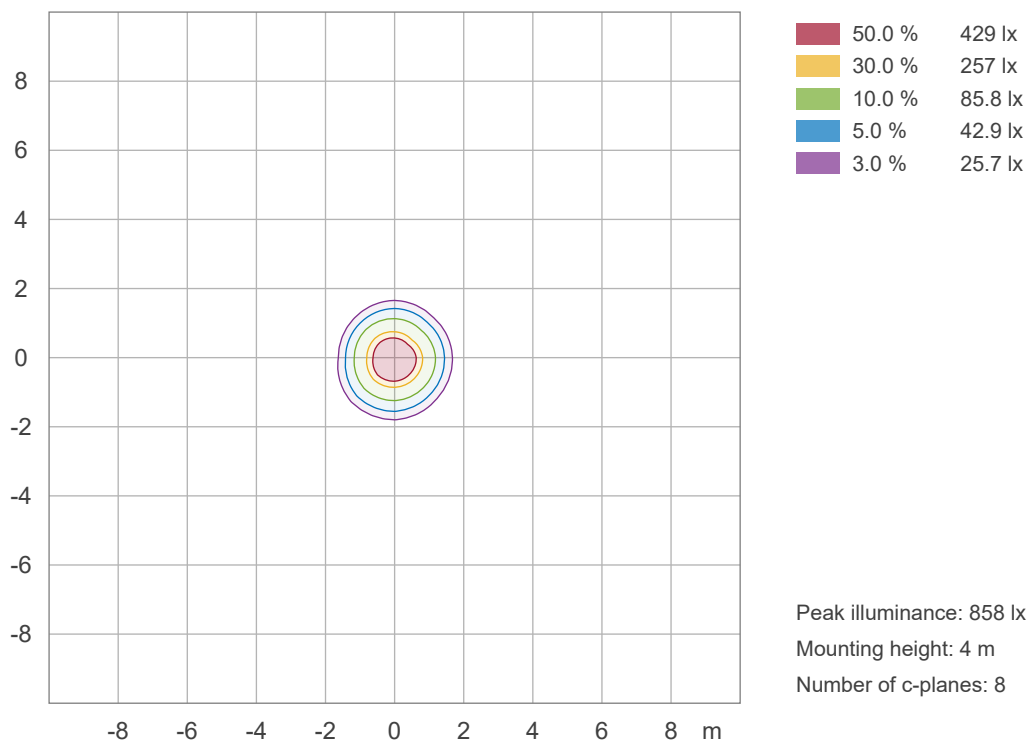


Linear intensity distribution diagram

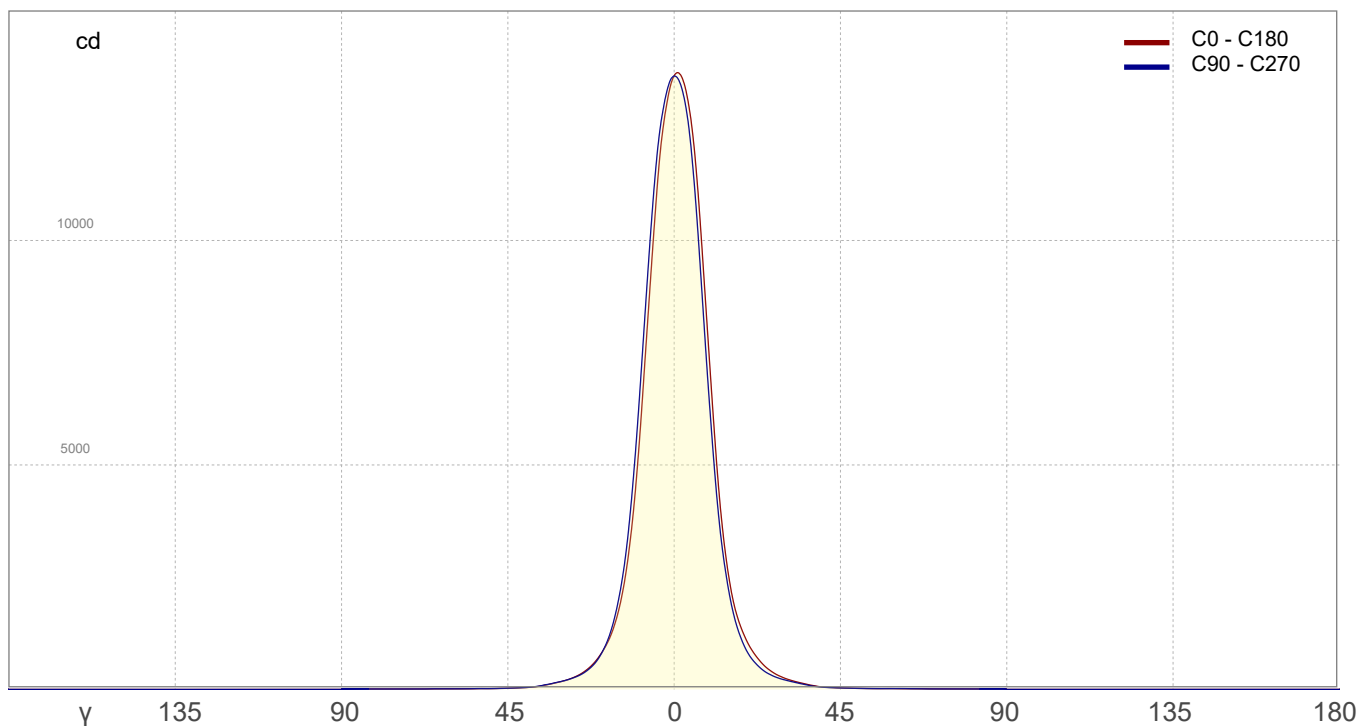

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U0 G0

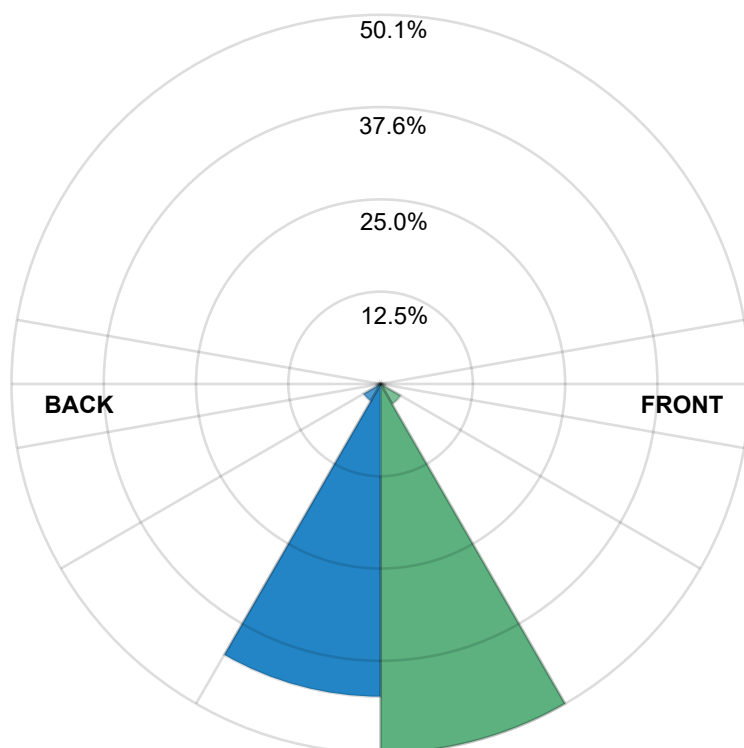

Forward Light

Low (0-30°)	939.7 lm	50.1%
Medium (30-60°)	58.9 lm	3.1%
High (60-80°)	11.3 lm	0.6%
Very High (80-90°)	4.8 lm	0.3%

Back Light

Low (0-30°)	796.0 lm	42.4%
Medium (30-60°)	50.0 lm	2.7%
High (60-80°)	10.6 lm	0.6%
Very High (80-90°)	4.8 lm	0.3%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	1876.0 lm	100,0%
-----	-----------	--------