

Laboratory and Equipment

Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	6/25/2026

Measurement Conditions

Tested c-planes	8
Tested gamma angles	181 – 1.00°
Input Power	29.5 W


Tested Light Source

Luminaire	2021/3/20 9:53:35
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	2030 lm – 0.0012% / 100%
Efficiency	68.83 lm/W
Peak Intensity	10.47 kcd
Correlated Color Temperature, CCT	3000 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

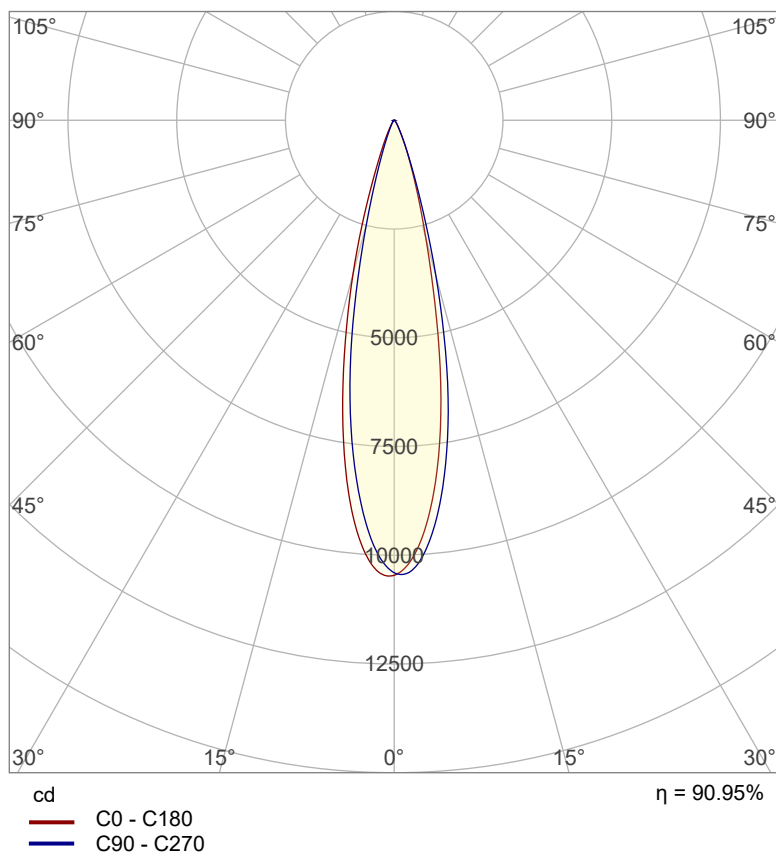


Beam details

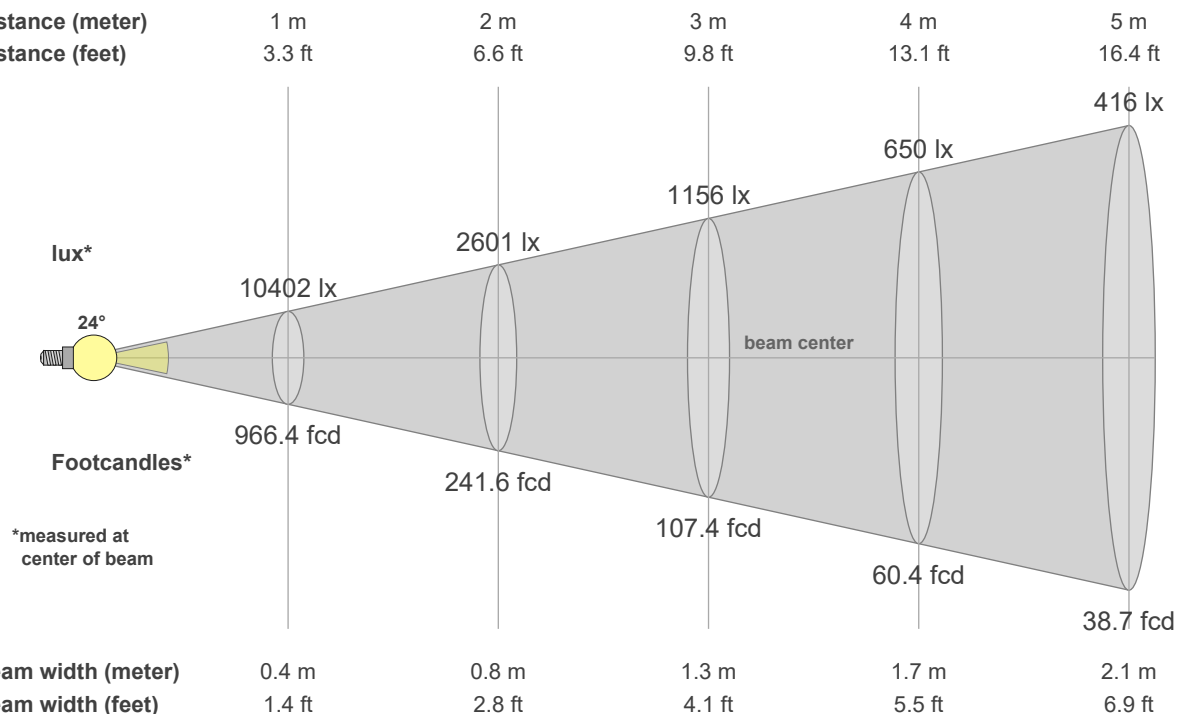


Luminaire budgetary diagram


LAMPS (number of lamps)

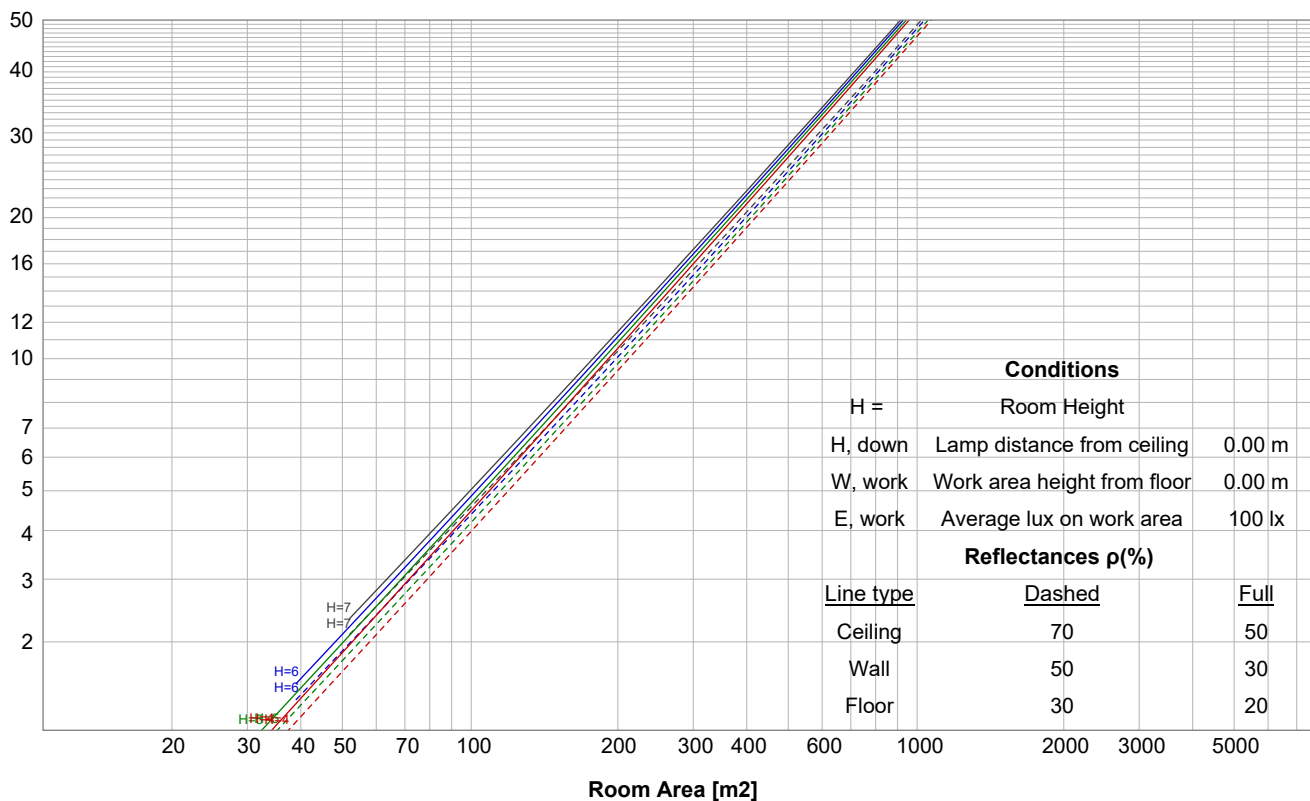


Iso-intensity Diagram (Iso-candela)

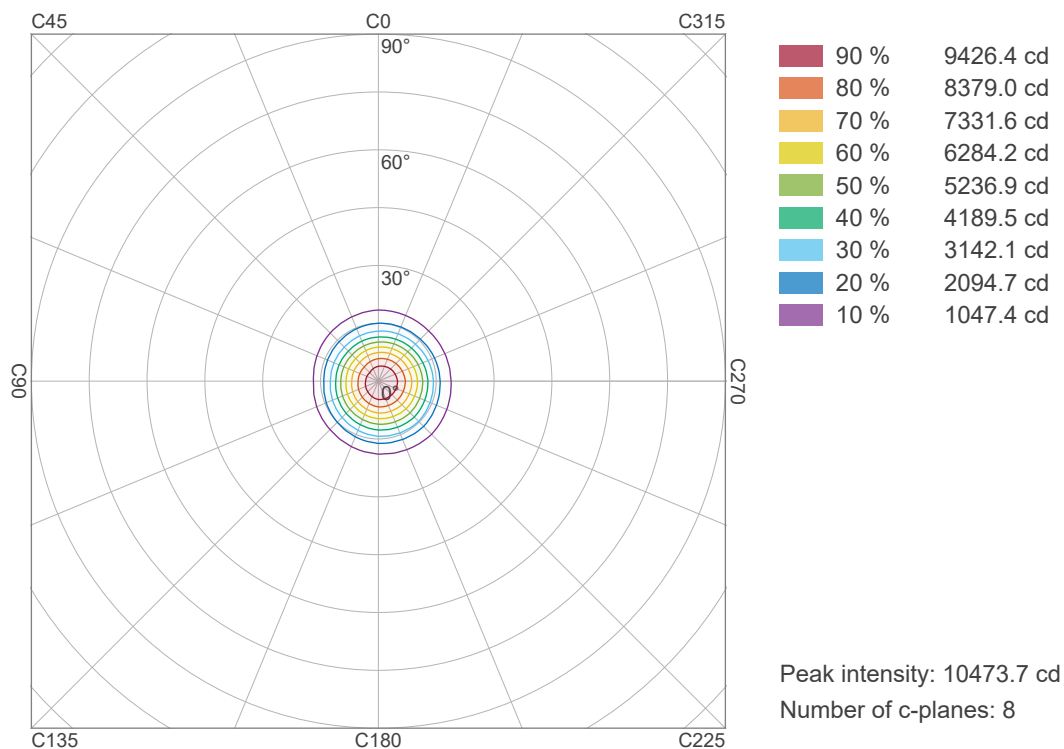

Iso-illuminance Diagram (Iso-lux)

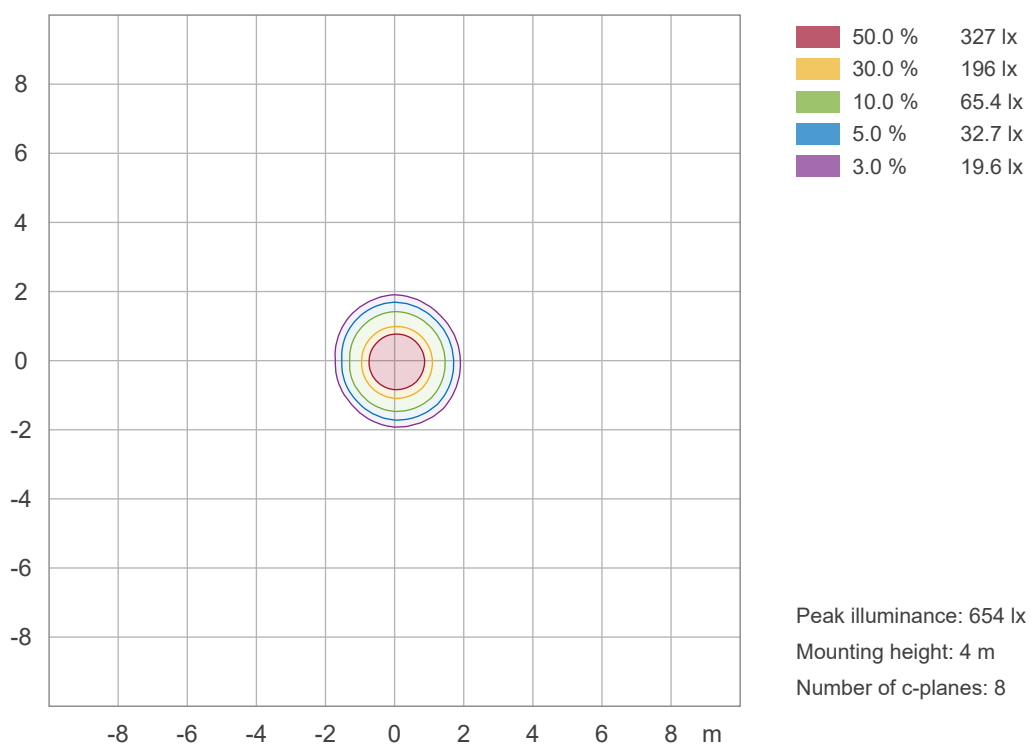


Linear intensity distribution diagram

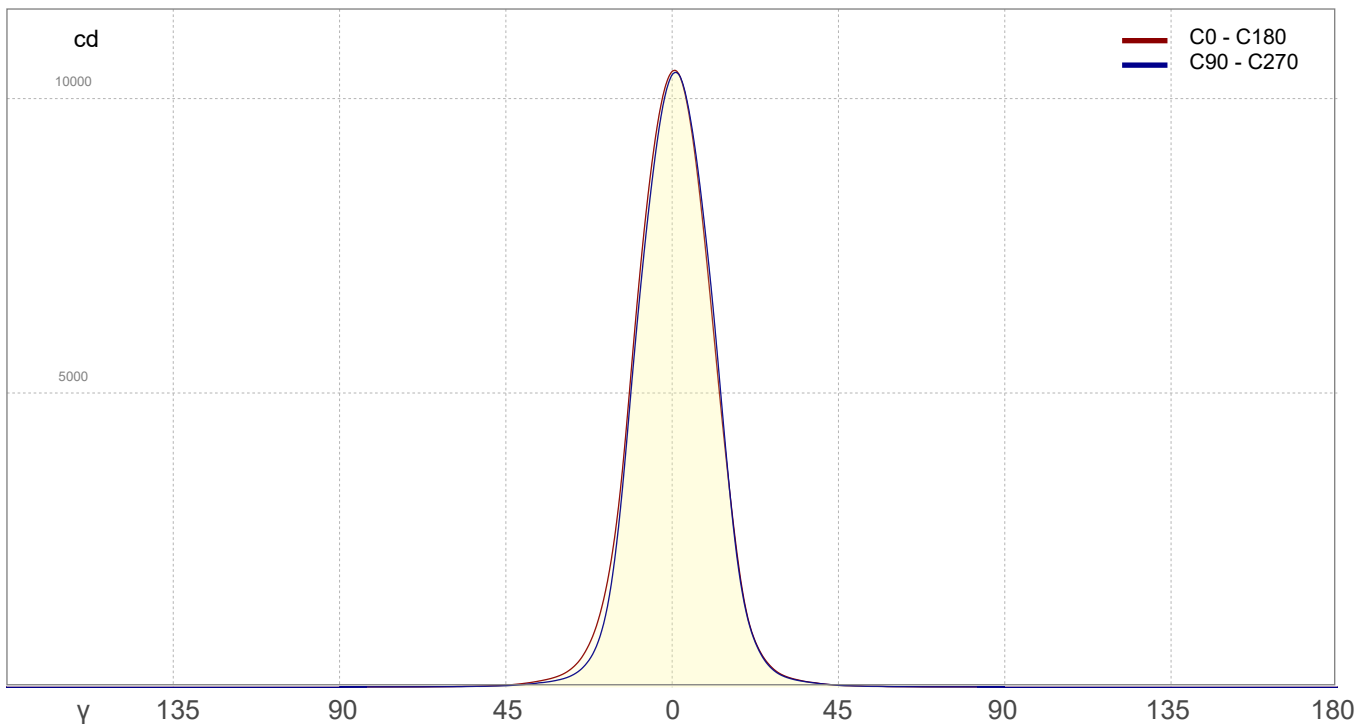

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U0 G0

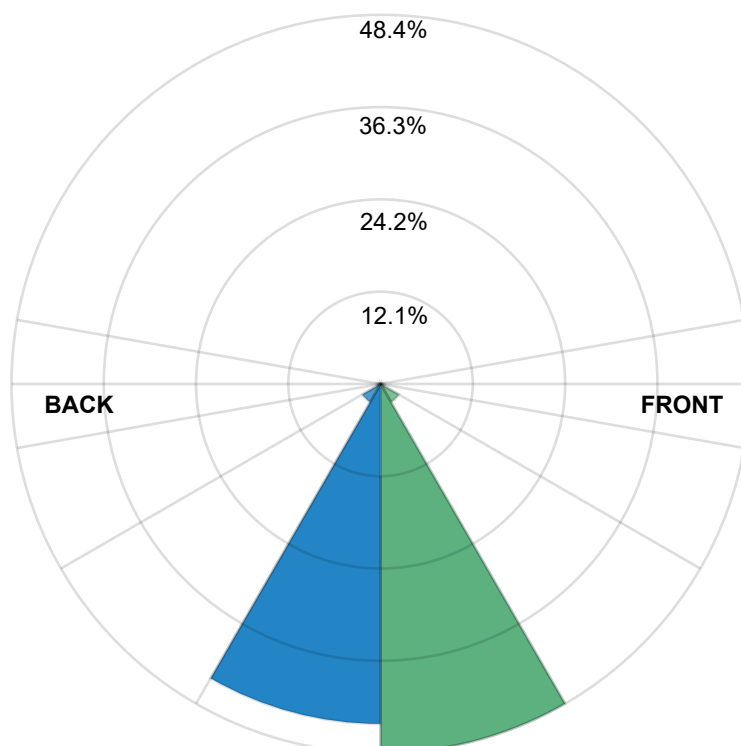

Forward Light

Low (0-30°)	983.5 lm	48.4%
Medium (30-60°)	56.0 lm	2.8%
High (60-80°)	10.2 lm	0.5%
Very High (80-90°)	4.6 lm	0.2%

Back Light

Low (0-30°)	905.6 lm	44.6%
Medium (30-60°)	55.8 lm	2.7%
High (60-80°)	10.2 lm	0.5%
Very High (80-90°)	4.6 lm	0.2%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	2030.5 lm	100,0%
-----	-----------	--------