



MON-DA0201-1 Mini Recessed LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Workmanship	Pure aluminium housing & integrated heatsink
Light Source	Luminus LED
Power	1 W
Color Rendering Index	Ra > 95
Luminous Flux	91 lm (3000K)
Color Temperature	2700K / 3000K / 4000K / 6000K
Beam Angle	12° / 20° / 30°
Driver	Eaglerise ELP01SS · PF ≥ 0.50
Input / Output	AC 100–240 V 50-60 Hz · DC 350 mA 2.5–4 V
Protection / Class	IP20 · Class II · Cut-out Ø38 mm

ACCESSORIES Options

- Matte Black housing
- Matte White housing
- Honeycomb louver (anti-glare)
- Frosted lens diffuser



Square recessed



Round recessed




Double recessed

COLOR TEMPERATURE



BEAM ANGLE

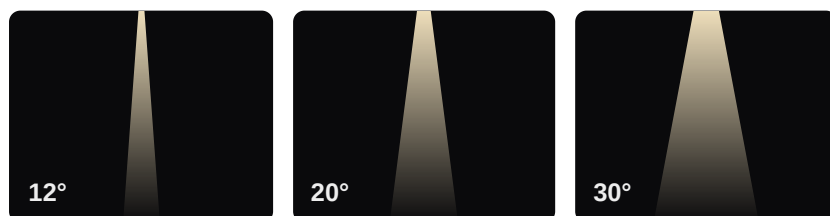

USAGE SPACES

- DISPLAY Showcase & display cabinets
- HOME Residential accent lighting
- RETAIL Commercial spaces

DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



Ceiling cut-out: Ø38 mm

Inner box: 7 × 7 × 5 cm

Carton: 37 × 30 × 32 cm · 80 pcs/ctn