

Product Description


This downlight series focus on the minimal appearance, giving stage to the light instead of the fixture. The fixture surface is treated by powder coating, making for a durable color, meeting the stylistic demands of different environments. It offers high anti-glare technology, high lighting efficiency and choice of dimensions and optical angles to fully satisfy all the different lighting effects.

Product Specification

Luminaire Wattage	15W
Luminaire Color	☐ White ☒ Black
Light Source	Luminus CXM-6
Color Temperature	2700K/3000K/4000K/5000K
Color Rendering Index	Ra>90
Beam Angle	12°/24°/36°
Luminous Flux	838 lm at 3000K
cut-out	Ø62MM
Driver	Eaglerise LS-12-350 SI3
Power Factor (PF)	≥0.50
Input	AC220-240V 50-60Hz
Output	DC350mA 30-42V
Class	II
IP Degree	IP20
Inner Box	8X8X13.5cm
Carton Size	44X18X29cm
QTY/CTN	20PCS/CTN
Net Weight	0.28KG/PCS

Model No.

MON-DB0415-C

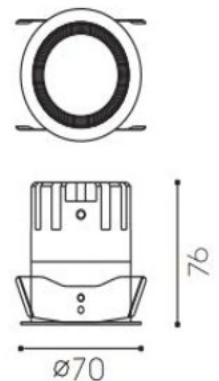



Light Distribution


3000K 12°

3000K 24°


3000K 36°



h(m)	E(lx)	D(m)
1	9088	15°
2	2272	0.43
3	1009	0.65
4	568	0.86



h(m)	E(lx)	D(m)
1	5513	24°
2	1378	0.76
3	612	1.15
4	344	1.53



h(m)	E(lx)	D(m)
1	2628	36°
2	657	1.21
3	292	1.81
4	164	2.41

Related references
Optional Accessories



Honeycomb
Size: 42×3



Combed Glass
Size: 42×3



Woven Glass
Size: 42×3

Related references
LED POWER SUPPLIES



Constant current power supply

Brand: Eaglerise

Triac

0-10V

Dali

Related project picture of product family:

