



MON-DB1001-15 Recessed LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Light Source	Luminus SST-20 LED module
Power	1 W
Luminous Flux	50 lm (3000K)
Light Effect	50.0 lm/W
Color Rendering Index	Ra ≥ 95
Color Temperature	2700K / 3000K / 4000K / 5000K
Beam Angle	20° / 25° / 38°
Driver	GLP06PE · PF ≥ 0.5
Input / Output	AC 220-240V 50-60Hz · DC 350mA 2-4V
Protection / Class	IP20 · Class II · Cut-out Ø15 mm


ACCESSORIES Options

- ☐ White housing
 - ☐ Black housing
 - ☐ Dimmable driver options: Triac / 0-10V / DALI
 - ☐ Honeycomb anti-glare louver
-  Round recessed
  Fixed downlight
  Trim / trimless

COLOR TEMPERATURE



BEAM ANGLE

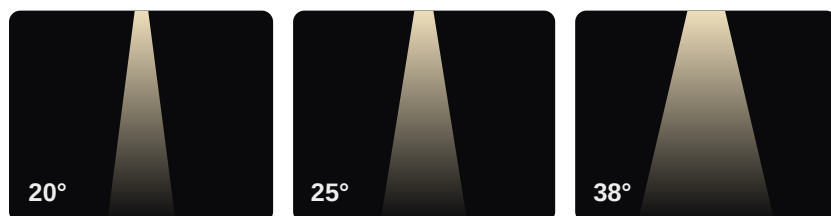

USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & display niches
- HOTEL** Hospitality & galleries

DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)


Ceiling cut-out: **Ø15 mm**

Inner box: **5 × 5 × 5 cm**

Carton: **27.5 × 27.5 × 22.5 cm · 125 pcs/ctn**

Net weight: **0.014 kg/pc**