



MON-FB0212-C Recessed LED Downlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

PRODUCT PARAMETERS Product Specification

Workmanship	Pure aluminum forged heatsink, 38° anti-glare cut-off
Light Source	2835 SMD LED
Power	Max 12 W
Color Rendering Index	Ra ≥ 80
Light Effect	66.7 lm/W
Luminous Flux	800 lm (4000K)
Color Temperature	2700K / 3000K / 4000K / 6400K
Beam Angle	60°
Driver	SL-CC280-12SL · PF ≥ 0.50 · AC 220-240 V
Protection / Class	IP20 · Class II · Cut-out 105×65 mm

OPTIONS Housing

☐ Matte White housing

INSTALLATION

Recessed ceiling mount


Ceiling cut-out: 105×65 mm

Net weight: 0.35 kg

COLOR TEMPERATURE



BEAM ANGLE

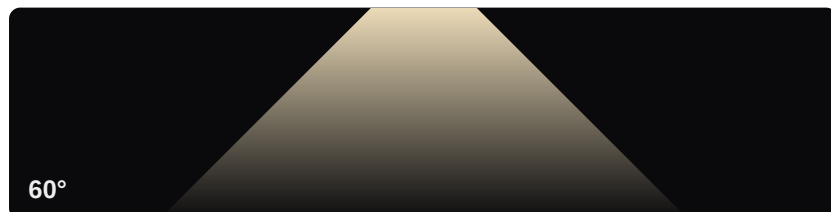

USAGE SPACES

☐ HOME Residential spaces

☐ RETAIL Commercial spaces

☐ EXPO Exhibition & display