



MON-FB0225-C Recessed LED Downlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

PRODUCT PARAMETERS Product Specification

Workmanship	Pure aluminum forged heatsink, 38° anti-glare cut-off
Light Source	Epistar LED
Power	Max 25 W
Color Rendering Index	Ra ≥ 80
Light Effect	72.0 lm/W
Luminous Flux	1800 lm (4000K)
Color Temperature	2700K / 3000K / 4000K / 6400K
Beam Angle	60°
Driver	SL-CC600-12SL · PF ≥ 0.90 · AC 220–240 V
Protection / Class	IP20 · Class II · Cut-out Ø150–155 mm

OPTIONS Housing

☐ Matte White housing

INSTALLATION

Recessed ceiling mount


Ceiling cut-out: Ø150–155 mm

Net weight: 0.65 kg

COLOR TEMPERATURE



BEAM ANGLE

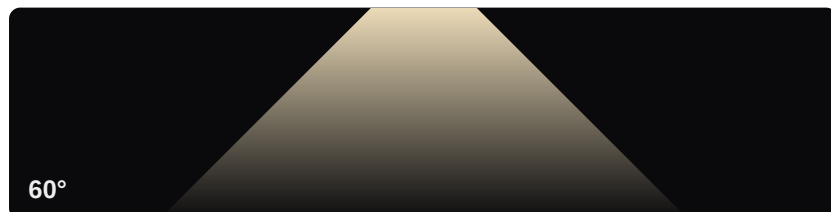

USAGE SPACES

☐ HOME Residential spaces

☐ RETAIL Commercial spaces

☐ EXPO Exhibition & display