


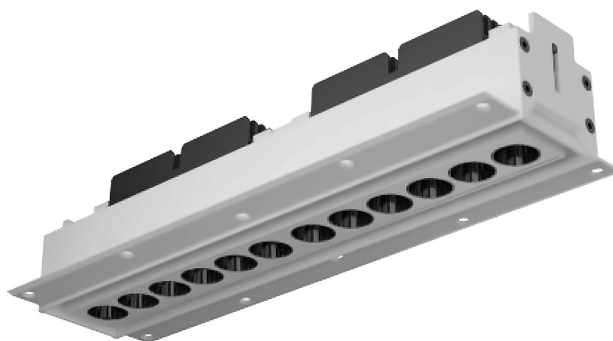

MON-G2R-12-WK Recessed LED Grille Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

PRODUCT PARAMETERS Specification

Light Source	SMD3535 LED · Ledlink precision lens
Light Heads	12 × module
Power	max. 24 W
Color Rendering Index	Ra > 90
Color Temperature	2700K – 5000K (2700K / 3000K / 4000K / 5000K)
Beam Angle	10° / 15° / 25° / 35° / 50°
Driver Options	ON/OFF · 0-10V · DALI · Tuya Smart
Dimensions	251 × 80 × 59 mm
Ceiling Cut-out	253 × 45 mm
Housing	White / Black · aluminum
Accessories	Honeycomb anti-glare optics

OPTIONS Configure to order

- ☐ White housing
- ☐ Black housing
- ☐ Driver: ON/OFF / 0-10V / DALI / Tuya Smart
- ☐ Honeycomb anti-glare louver
- ☐ CCT options: 2700K / 3000K / 4000K / 5000K



Recessed




Round aperture




Trim / trimless


COLOR TEMPERATURE




2700K



3000K




4000K




5000K

BEAM ANGLE




10°



15°



25°



35°




50°

USAGE SPACES

- ☐ HOME Residential accent lighting
- ☐ RETAIL Shops & display niches
- ☐ HOTEL Hospitality & galleries

DIMENSIONS unit: mm (untoleranced dimensions ±0.5 mm)



cut-out 253 × 45 mm

Body: 251 × 80 × 59 mm
Ceiling cut-out: 253 × 45 mm
Material: die-cast aluminum
Finish: white or black, matt