


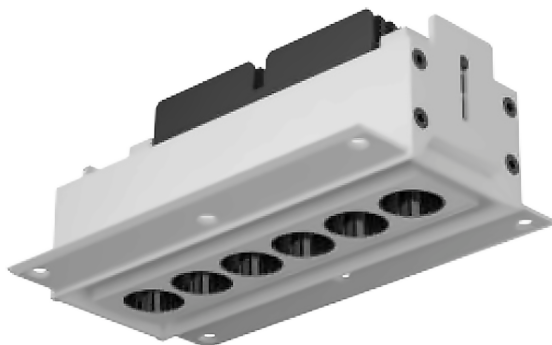

## MON-G2R-6-WK Recessed LED Grille Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

### PRODUCT PARAMETERS Specification

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Light Source          | SMD3535 LED · Ledlink precision lens          |
| Light Heads           | 6 × module                                    |
| Power                 | max. 12 W                                     |
| Color Rendering Index | Ra > 90                                       |
| Color Temperature     | 2700K – 5000K (2700K / 3000K / 4000K / 5000K) |
| Beam Angle            | 10° / 15° / 25° / 35° / 50°                   |
| Driver Options        | ON/OFF · 0-10V · DALI · Tuya Smart            |
| Dimensions            | 133 × 80 × 59 mm                              |
| Ceiling Cut-out       | 135 × 45 mm                                   |
| Housing               | White / Black · aluminum                      |
| Accessories           | Honeycomb anti-glare optics                   |

### OPTIONS Configure to order

- ☐ White housing
- ☐ Black housing
- ☐ Driver: ON/OFF / 0-10V / DALI / Tuya Smart
- ☐ Honeycomb anti-glare louver
- ☐ CCT options: 2700K / 3000K / 4000K / 5000K



Recessed




Round aperture




Trim / trimless


### COLOR TEMPERATURE




2700K



3000K




4000K




5000K

### BEAM ANGLE




10°



15°



25°



35°




50°

### USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & display niches
- HOTEL** Hospitality & galleries

### DIMENSIONS unit: mm (untoleranced dimensions ±0.5 mm)

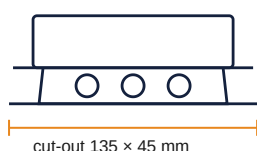

cut-out 135 × 45 mm

Body: 133 × 80 × 59 mm  
 Ceiling cut-out: 135 × 45 mm  
 Material: die-cast aluminum  
 Finish: white or black, matt