


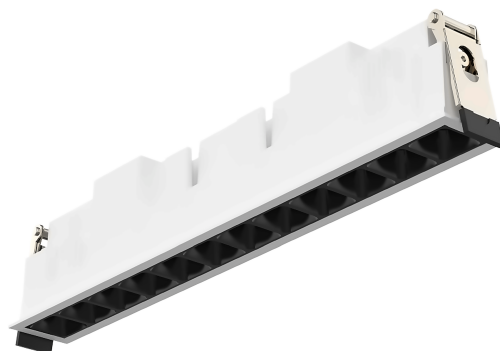

## MON-G4E-12 Recessed LED Grille Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

### PRODUCT PARAMETERS Specification

|                       |                                               |
|-----------------------|-----------------------------------------------|
| Light Source          | SMD3535 LED · Ledlink precision lens          |
| Light Heads           | 12 × module                                   |
| Power                 | max. 32 W                                     |
| Color Rendering Index | Ra > 90                                       |
| Color Temperature     | 2700K – 5000K (2700K / 3000K / 4000K / 5000K) |
| Beam Angle            | 10° / 15° / 25° / 35°                         |
| Driver Options        | ON/OFF · 0-10V · DALI · Tuya Smart            |
| Dimensions            | 269.5 × 31.5 × 56 mm                          |
| Ceiling Cut-out       | 263 × 25 mm                                   |
| Housing               | White / Black · aluminum                      |
| Accessories           | Honeycomb anti-glare optics                   |

### OPTIONS Configure to order

- ☐ White housing
- ☐ Black housing
- ☐ Driver: ON/OFF / 0-10V / DALI / Tuya Smart
- ☐ Honeycomb anti-glare louver
- ☐ CCT options: 2700K / 3000K / 4000K / 5000K



Recessed




Square aperture




Trim / trimless


### COLOR TEMPERATURE




2700K



3000K




4000K




5000K


### BEAM ANGLE




10°



15°



25°




35°

### USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & display niches
- HOTEL** Hospitality & galleries

### DIMENSIONS unit: mm (untoleranced dimensions ±0.5 mm)



cut-out 263 × 25 mm

Body: 269.5 × 31.5 × 56 mm

Ceiling cut-out: 263 × 25 mm

Material: die-cast aluminum

Finish: white or black, matt