



MON-RP1218 Pendant Reflector LED Spotlight

✓ UGR = 0

✓ Ra > 97


✓ CE / RoHS

PRODUCT PARAMETERS Specification


Light Technology	Reflector-based indirect emission
Glare Rating	UGR = 0 · invisible light source
Power	18 W
Color Rendering Index	Ra > 97
Color Temperature	2700K / 3000K / 3500K / 4000K / 6500K
Beam Angle	15° / 24° / 36°
Dimensions	Ø125 × H43 mm
Housing	White / Black · aluminum
Installation	Pendant / recessed frame

OPTIONS Configure to order


- ☐ White housing
- ☐ Black housing
- ☐ CCT: 2700K / 3000K / 3500K / 4000K / 6500K
- ☐ Beam: 15° / 24° / 36°

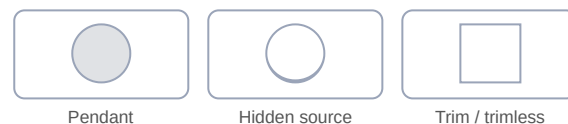

COLOR TEMPERATURE

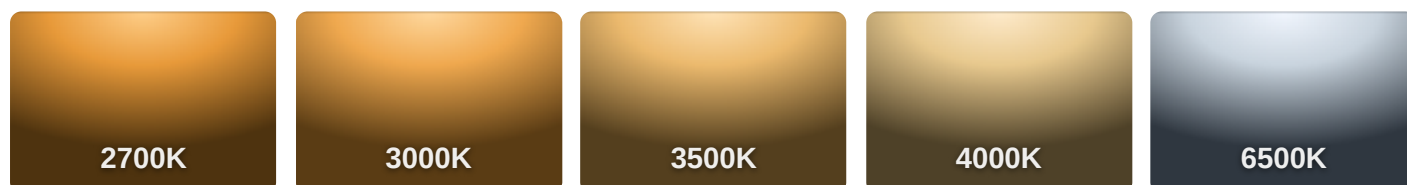

BEAM ANGLE

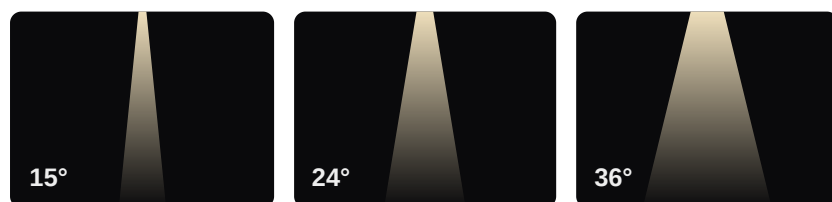

USAGE SPACES

- ☐ HOME Whole-home comfort lighting
- ☐ RETAIL Shops & display niches
- ☐ HOTEL Hospitality & galleries

DIMENSIONS unit: mm (untoleranced dimensions ±0.5 mm)



Body: Ø125 × H43 mm
Emission: indirect, reflector-based
Material: die-cast aluminum
Glare: UGR = 0