



MON-SA0860-C LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Workmanship	Miniaturized die-cast body, thermal superconductor 300,000 W/mK
Light Source	Luminus CHM-22 COB LED
Power	Max 60 W
Color Rendering Index	Ra ≥ 80
Light Effect	80.05 lm/W
Luminous Flux	4803 lm (3000K)
Color Temperature	3000K / 4000K / 5000K
Beam Angle	15° / 28° / 38°
Driver	LPC-60-1400 · PF ≥ 0.90 · AC 90–240 V
Protection / Class	IP20 · Class III · Cut-out Ø165 mm

ACCESSORIES Options



Matte Black housing



Matte White housing



Honeycomb louver (anti-glare)



Frosted lens diffuser



Square recessed



Round recessed




Double recessed


COLOR TEMPERATURE



3000K

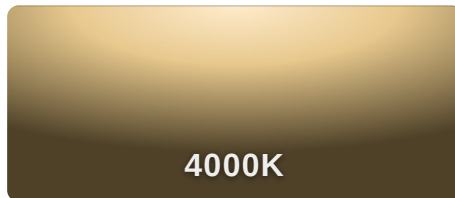


4000K

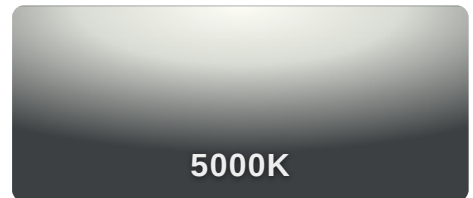


5000K


BEAM ANGLE



15°



28°



38°

USAGE SPACES



Residential spaces




Commercial spaces



Exhibition & display

SIZE DRAWING unit: mm (untoleranced dimensions ±0.5 mm)



Overall diameter: Ø175 mm

Height: 174 mm

Ceiling cut-out: Ø165 mm

Net weight: 1.1 kg