

Laboratory and Equipment

Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	7/14/2026

Measurement Conditions

Tested c-planes	12
Tested gamma angles	181 – 1.00°
Input Power	90.34 W


Tested Light Source

Luminaire	0
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	7917 lm – 1.404% / 98.6%
Efficiency	87.63 lm/W
Peak Intensity	14.36 kcd
Correlated Color Temperature, CCT	3000 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

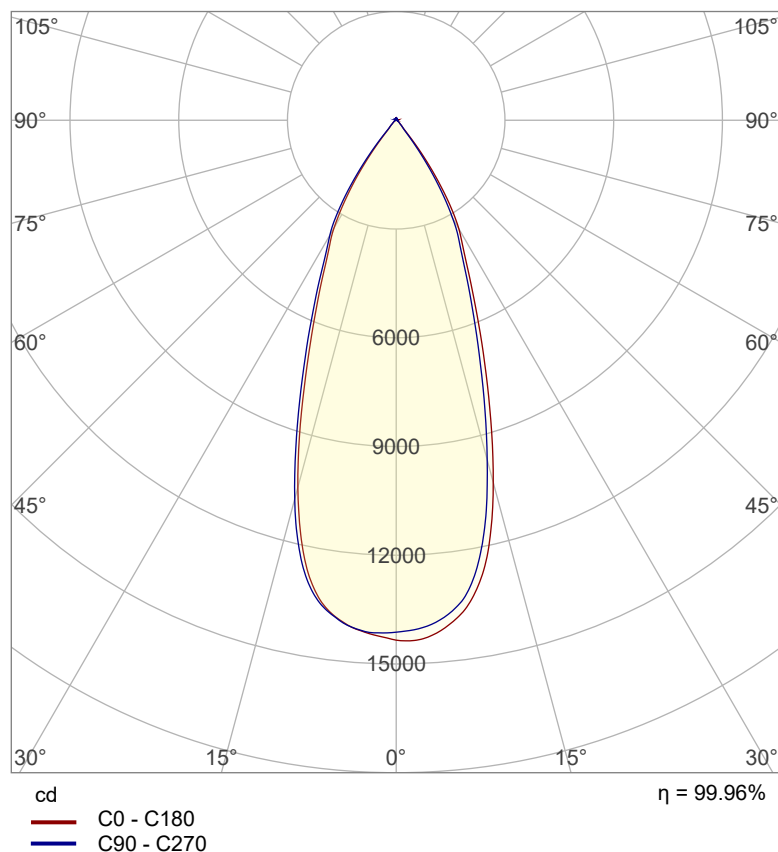


Beam details

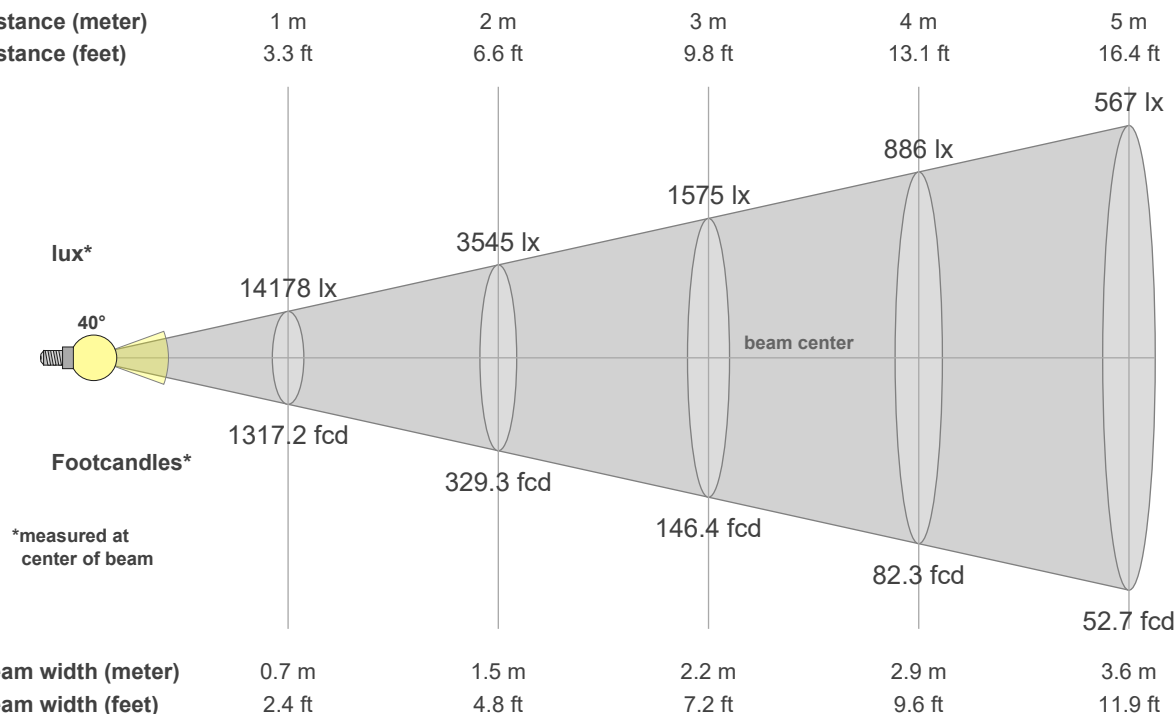


Luminaire budgetary diagram


LAMPS (number of lamps)

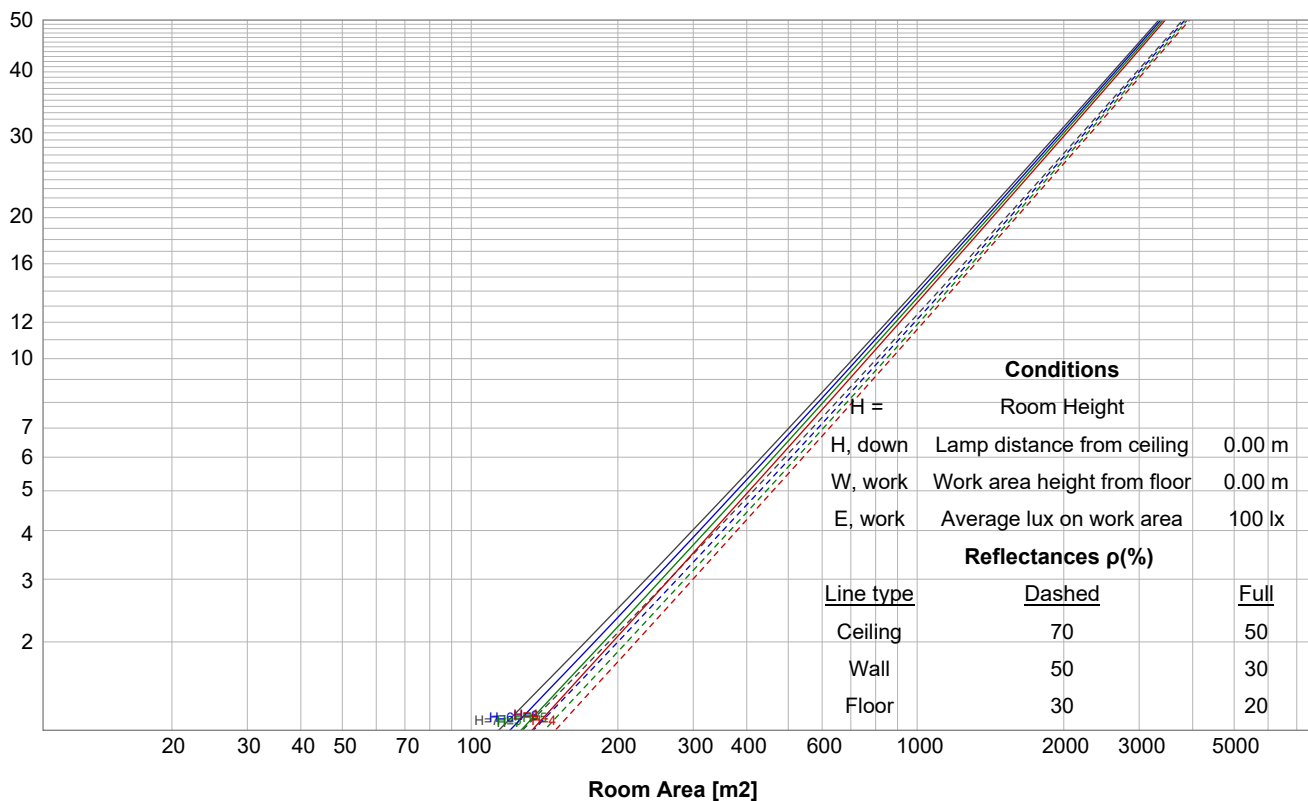


Iso-intensity Diagram (Iso-candela)

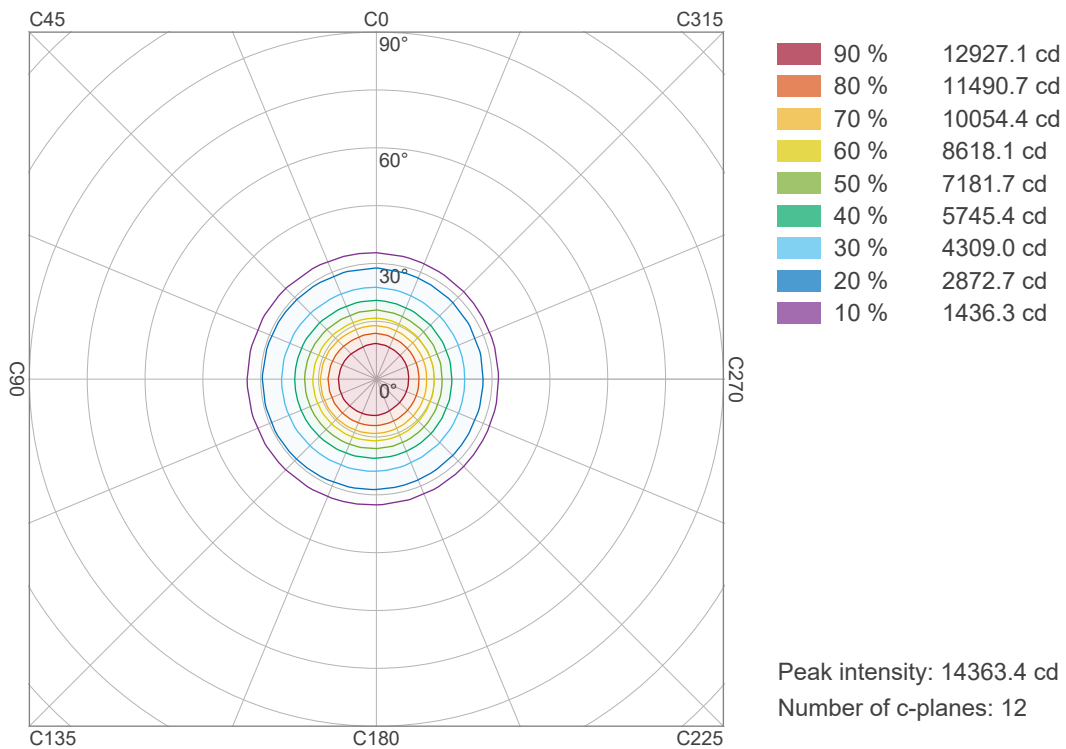

Iso-illuminance Diagram (Iso-lux)

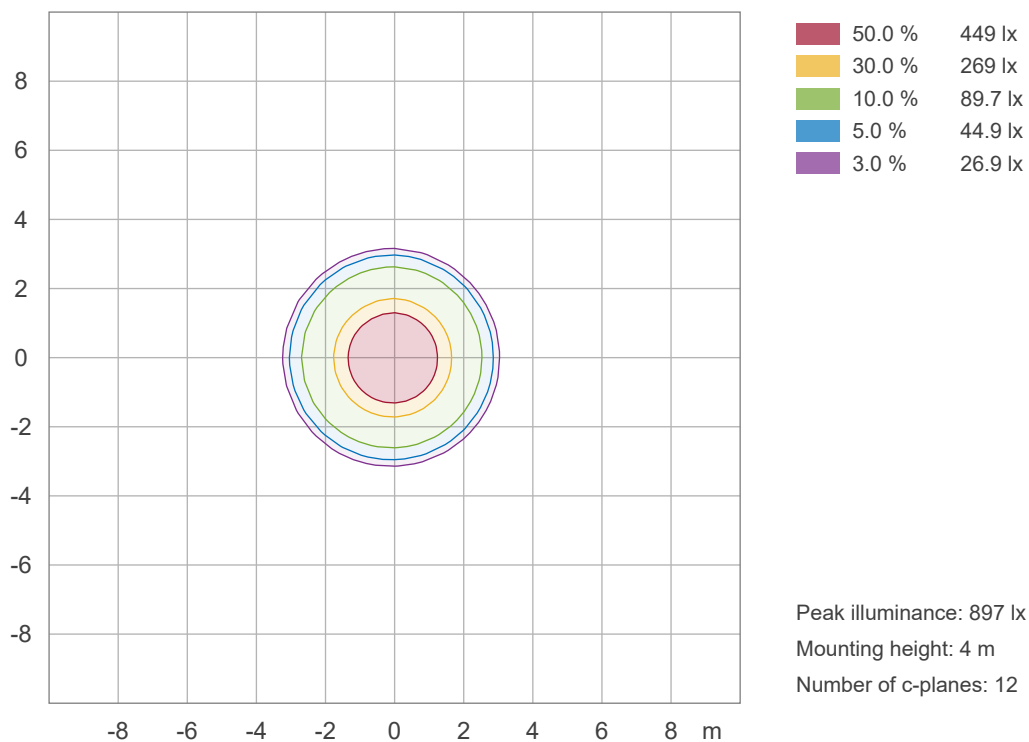


Linear intensity distribution diagram

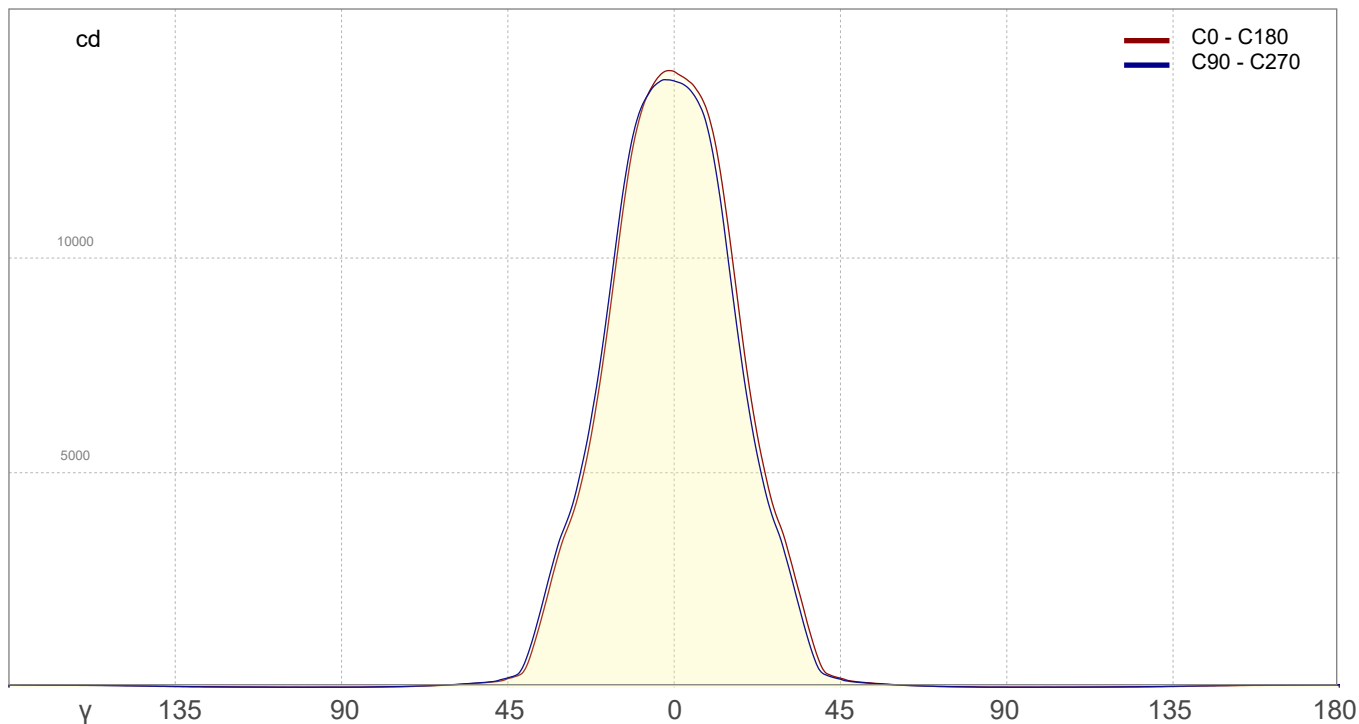

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B4 U3 G0

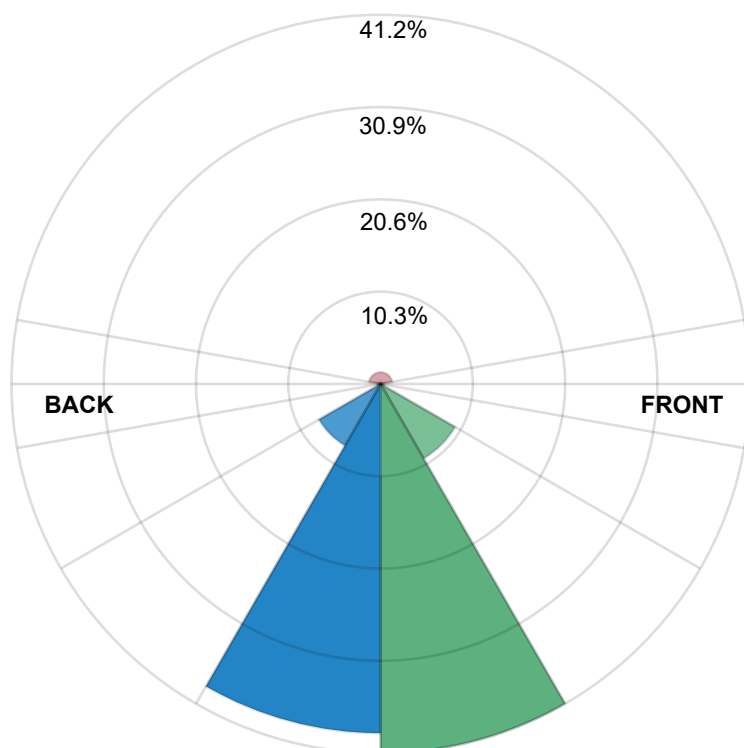

Forward Light

Low (0-30°)	3262.4 lm	41.2%
Medium (30-60°)	760.8 lm	9.6%
High (60-80°)	31.0 lm	0.4%
Very High (80-90°)	3.9 lm	0.0%

Back Light

Low (0-30°)	3085.8 lm	39.0%
Medium (30-60°)	629.4 lm	7.9%
High (60-80°)	28.7 lm	0.4%
Very High (80-90°)	3.7 lm	0.0%

Uplight

Low (90-100°)	5.7 lm	0.07%
High (100-180°)	105.4 lm	1.3%

Total

Sum	7916.7 lm	100,0%
-----	-----------	--------