



MON-SA0890-C LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Workmanship	Miniaturized die-cast body, thermal superconductor 300,000 W/mK
Light Source	Luminus CHM-22 COB LED
Power	Max 90 W
Color Rendering Index	Ra ≥ 80
Light Effect	90.88 lm/W
Luminous Flux	8179 lm (3000K)
Color Temperature	3000K / 4000K / 5000K
Beam Angle	18° / 28° / 38°
Driver	LPC-100-2100 · PF ≥ 0.50 · AC 90–240 V
Protection / Class	IP20 · Class III · Cut-out Ø165 mm

ACCESSORIES Options

- Matte Black housing
- Matte White housing
- Honeycomb louver (anti-glare)
- Frosted lens diffuser



Square recessed




Round recessed




Double recessed


COLOR TEMPERATURE

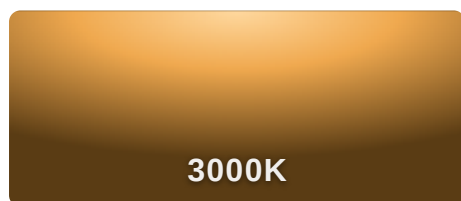

3000K

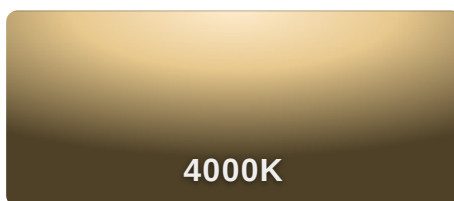


4000K

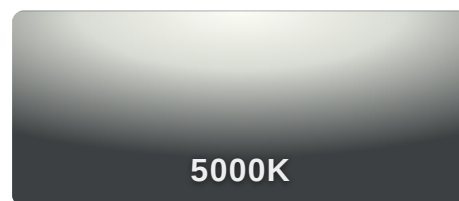


5000K


BEAM ANGLE



18°



28°




38°

USAGE SPACES

- HOME Residential spaces
- RETAIL Commercial spaces
- EXPO Exhibition & display

SIZE DRAWING unit: mm (untoleranced dimensions ±0.5 mm)


Overall diameter: **Ø175 mm**

Height: **174 mm**

Ceiling cut-out: **Ø165 mm**

Net weight: **1.1 kg**