



MON-SA1010-C Recessed LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Light Source	HRB0607 LED module
Power	10 W
Luminous Flux	528 lm (3000K)
Light Effect	52.8 lm/W
Color Rendering Index	Ra ≥ 95
Color Temperature	2700K / 3000K
Beam Angle	15° / 24° / 36°
Driver	LS-12-250 SI3 · PF ≥ 0.5
Input / Output	AC 220-240V 50-60Hz · DC 250mA 30-42V
Protection / Class	IP20 · Class I

ACCESSORIES Options

- ☐ White housing
- ☐ Black housing
- ☐ Dimmable driver options: Triac / 0-10V / DALI
- ☐ Asymmetric wall-washer lens



Round recessed




Adjustable tilt




Trim / trimless

COLOR TEMPERATURE

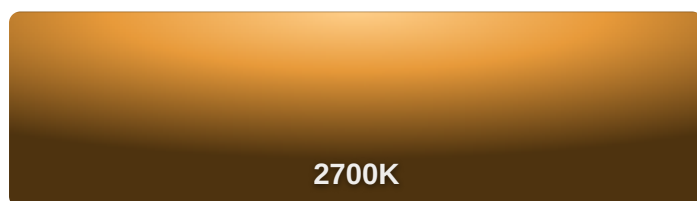


2700K

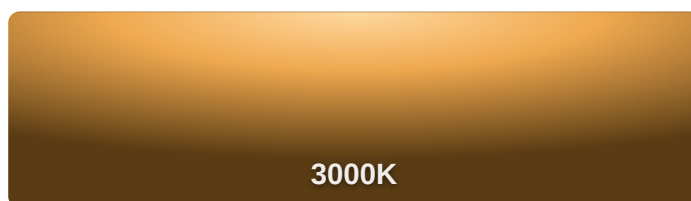


3000K


BEAM ANGLE



15°



24°



36°

USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & commercial spaces
- HOTEL** Hospitality & galleries

DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



recessed installation

Inner box: 14 × 11.5 × 11.5 cm

Carton: 43.5 × 36 × 47.5 cm · 36 pcs/ctn

Net weight: 0.6 kg/pc