



MON-SA2315-N Recessed LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Light Source	HRA0610 LED module
Power	15 W
Luminous Flux	1093 lm (3000K)
Light Effect	72.9 lm/W
Color Rendering Index	Ra ≥ 95
Color Temperature	2700K / 3000K / 4000K / 5000K
Beam Angle	15° / 24° / 36° / 50°
Driver	LS-12-350 SI ECO · PF ≥ 0.50
Input / Output	AC 220-240V 50/60Hz · DC 36V 350mA
Protection / Class	IP20 · Class II · Cut-out Ø75 mm


ACCESSORIES Options

- ☐ White housing
 - ☐ Black housing
 - ☐ Dimmable driver options: Triac / 0-10V / DALI
 - ☐ Asymmetric wall-washer lens
-  Round recessed
  Adjustable tilt
  Trim / trimless

COLOR TEMPERATURE



BEAM ANGLE

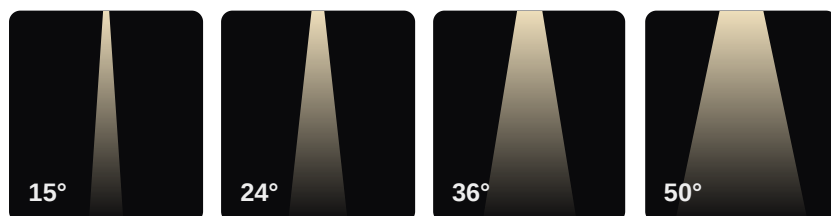

USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & commercial spaces
- HOTEL** Hospitality & galleries

DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



Ceiling cut-out: **Ø75 mm**
 Inner box: **11 × 11 × 9.5 cm**
 Carton: **46 × 24 × 31 cm · 24 pcs/ctn**
 Net weight: **0.3 kg/pc**