



MON-SB0230-C LED Downlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

PRODUCT PARAMETERS Product Specification

Workmanship	Die-cast aluminum body, anti-glare deep-cup optics
Light Source	Luxeon COB 1204HD
Power	Max 31 W
Color Rendering Index	Ra ≥ 90
Light Effect	83.4 lm/W
Luminous Flux	2584 lm (3000K)
Color Temperature	2700K / 3000K / 3500K / 4000K
Beam Angle	15° / 24° / 38°
Driver	LS-40-700 LI2 · PF ≥ 0.90 · AC 220–240 V
Protection / Class	IP20 · Class I · Cut-out Ø118 mm

OPTIONS Housing



Matte Black housing

INSTALLATION

Recessed ceiling mount

Ceiling cut-out: Ø118 mm


Overall size: Ø126 × 135 mm

Net weight: 0.70 kg

COLOR TEMPERATURE



BEAM ANGLE

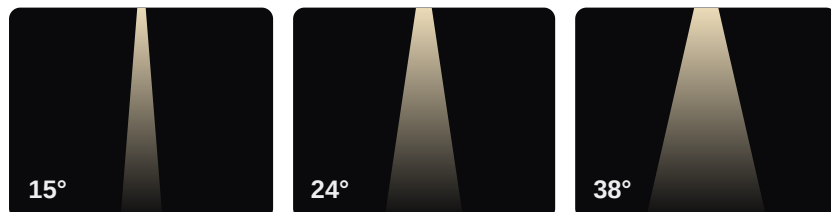

USAGE SPACES



Residential spaces



Commercial spaces



Exhibition & display