



MON-SB0240-C LED Downlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

PRODUCT PARAMETERS Product Specification

Workmanship	Die-cast aluminum body, anti-glare deep-cup optics
Light Source	Luminus CXM-9 COB LED
Power	Max 40 W
Color Rendering Index	Ra ≥ 90
Light Effect	69.5 lm/W
Luminous Flux	2780 lm (3000K)
Color Temperature	2700K / 3000K / 4000K
Beam Angle	15° / 24° / 38°
Driver	LS-40-900 LI2 · PF ≥ 0.90 · AC 220–240 V
Protection / Class	IP20 · Class II · Cut-out Ø118 mm

OPTIONS Housing



Matte Black housing

INSTALLATION


Recessed ceiling mount

Ceiling cut-out: **Ø118 mm**


Overall size: **Ø126 × 135 mm**

Net weight: **0.64 kg**

COLOR TEMPERATURE

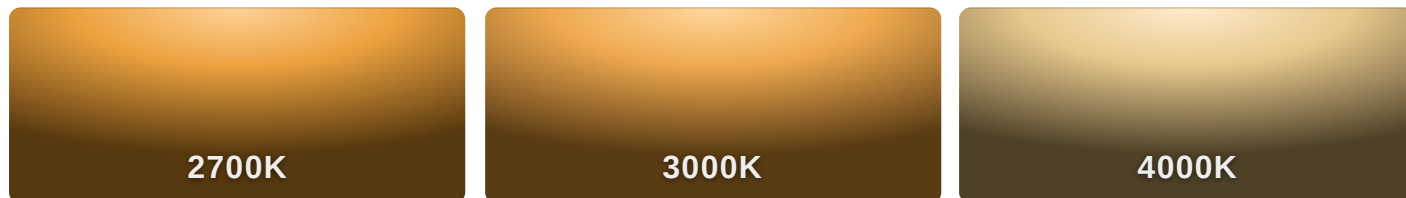

BEAM ANGLE

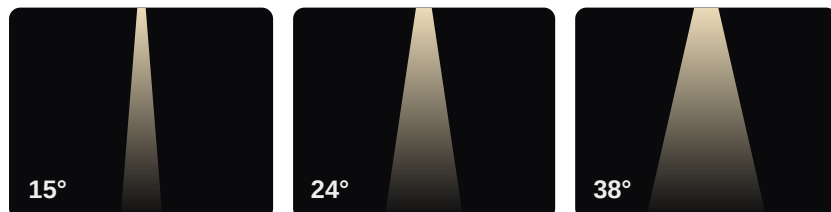

USAGE SPACES



Residential spaces



Commercial spaces



Exhibition & display