

## MON-SB0510-2 Recessed Linear LED Luminaire

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

### PRODUCT PARAMETERS Product Specification

|                       |                                             |
|-----------------------|---------------------------------------------|
| Workmanship           | Aluminum body, multi-cell anti-glare optics |
| Light Source          | Cree XP-E LED                               |
| Power                 | Max 10 W (10 × 1 W)                         |
| Color Rendering Index | Ra ≥ 80                                     |
| Light Effect          | 40.0 lm/W                                   |
| Luminous Flux         | 400 lm (3000K)                              |
| Color Temperature     | 2700K / 3000K / 4000K                       |
| Beam Angle            | 15° / 30° / 45°                             |
| Driver                | EIP012C0700L3 · PF ≥ 0.50 · AC 220–240 V    |
| Protection / Class    | IP20 · Class II · Cut-out 140×37 mm         |

### OPTIONS Housing

- ☐ Matte White housing
- ☐ Matte Black housing


### INSTALLATION

Recessed ceiling mount


Ceiling cut-out: 140 × 37 mm

Output: DC 700 mA, 11.5–17.5 V

### COLOR TEMPERATURE

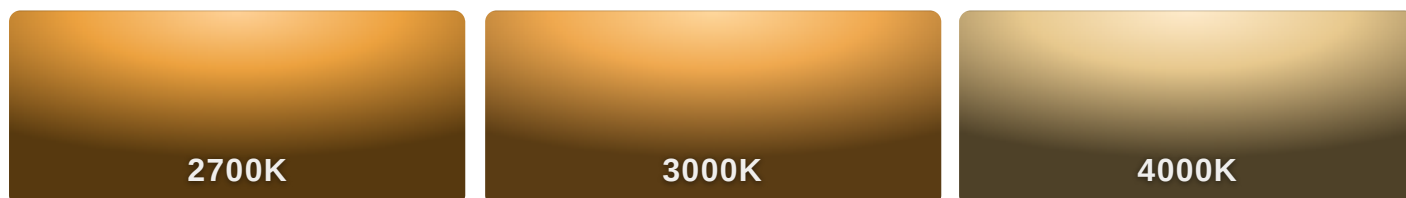

### BEAM ANGLE

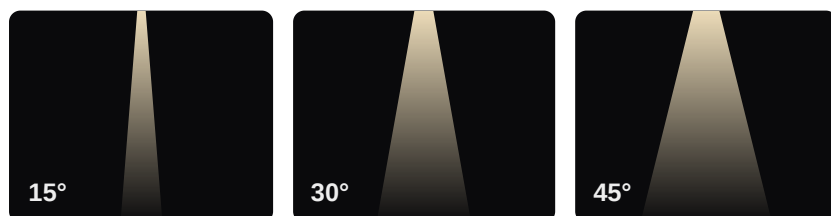

### USAGE SPACES

- ☐ HOME Residential spaces
- ☐ RETAIL Commercial spaces
- ☐ EXPO Exhibition & display