



MON-SB1010-N Recessed LED Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

SPOTLIGHT PARAMETERS Product Specification

Light Source	HRB0607 3000K Ra95 LED module
Power	10 W
Luminous Flux	474 lm (3000K)
Light Effect	47.4 lm/W
Color Rendering Index	Ra ≥ 95
Color Temperature	2700K / 3000K / 4000K / 5000K
Beam Angle	15° / 24° / 36°
Driver	LS-12-250 SI ECO · PF ≥ 0.5
Input / Output	AC 220-240V 50-60Hz · DC 250mA 30-42V
Protection / Class	IP20 · Class I

ACCESSORIES Options



White housing



Black housing



Dimmable driver options: Triac / 0-10V / DALI



Asymmetric wall-washer lens



Round recessed




Adjustable tilt




Trim / trimless


COLOR TEMPERATURE




2700K



3000K




4000K

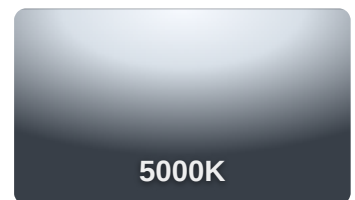


5000K


BEAM ANGLE



15°



24°



36°

USAGE SPACES



HOME

Residential accent lighting



RETAIL

Shops & commercial spaces



HOTEL

Hospitality & galleries

DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



recessed installation

Inner box: 14 × 11.5 × 11.5 cm

Carton: 43.5 × 36 × 47.5 cm · 36 pcs/ctn

Net weight: 0.31 kg/pc