

Laboratory and Equipment

Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	7/14/2026

Measurement Conditions

Tested c-planes	8
Tested gamma angles	181 – 1.00°
Input Power	21.21 W


Tested Light Source

Luminaire	2021/4/24 8:54:44
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	944.7 lm – 0.0043% / 100%
Efficiency	44.54 lm/W
Peak Intensity	2764 cd
Correlated Color Temperature, CCT	3000 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

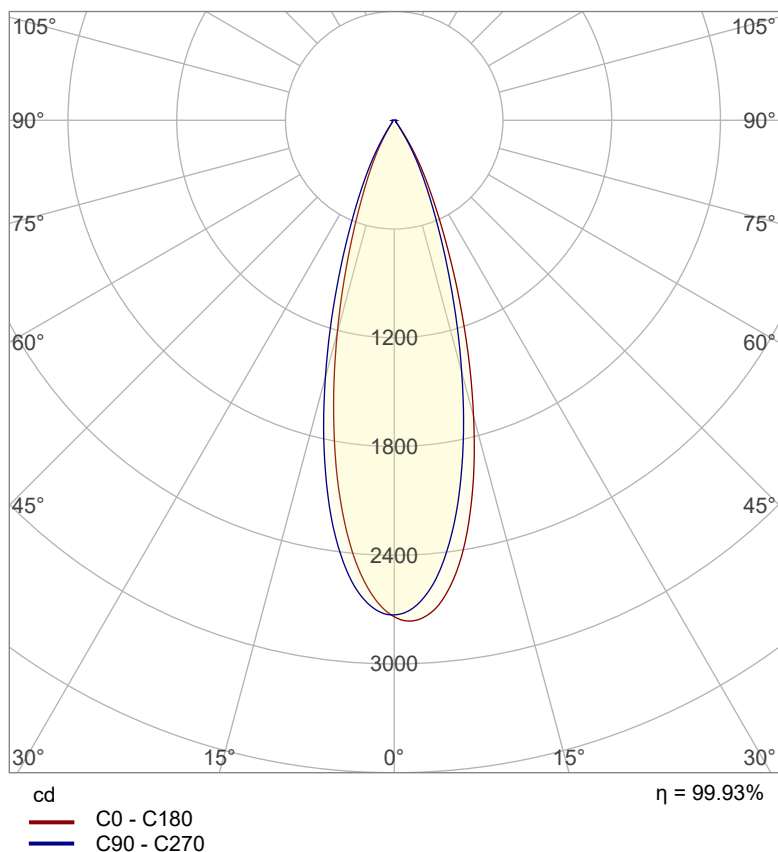


Beam details

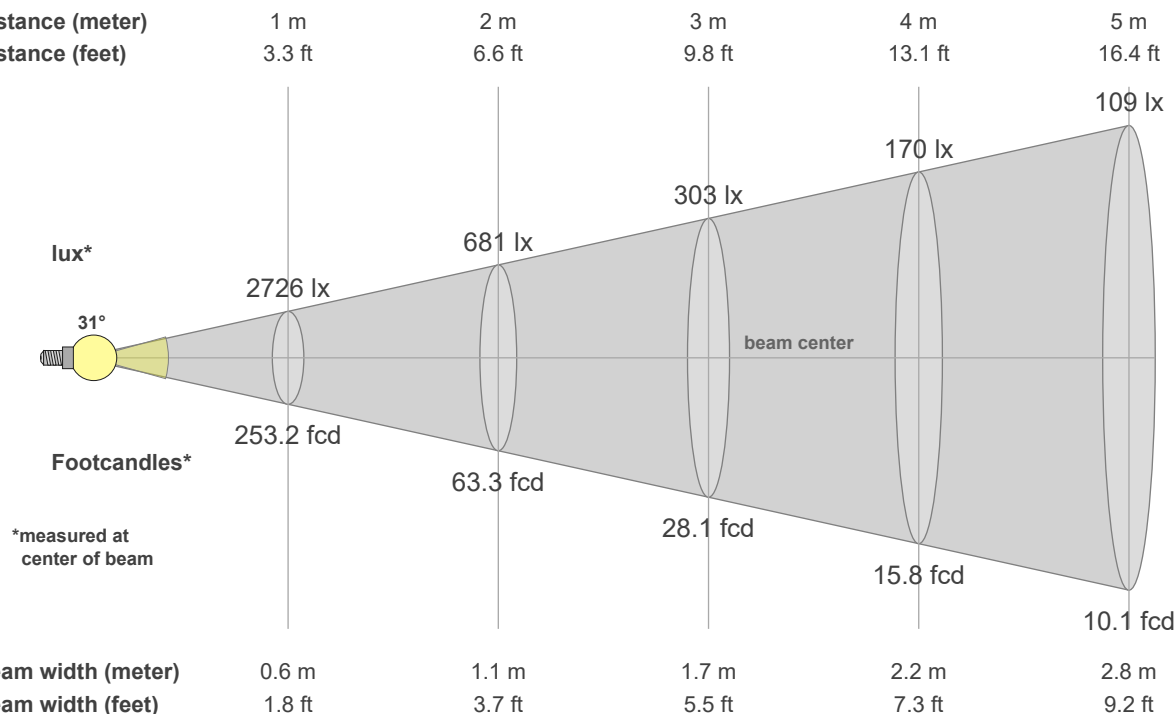


Luminaire budgetary diagram


LAMPS (number of lamps)

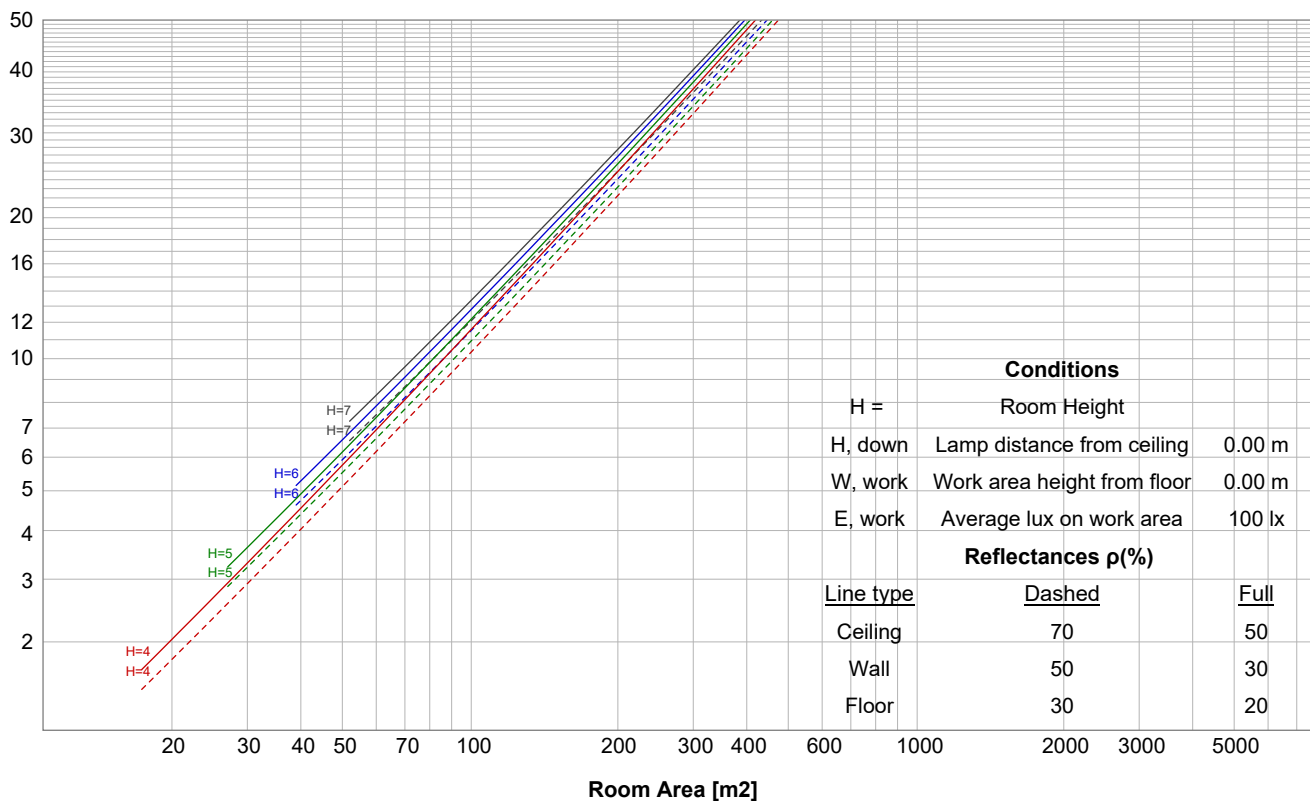


Iso-intensity Diagram (Iso-candela)

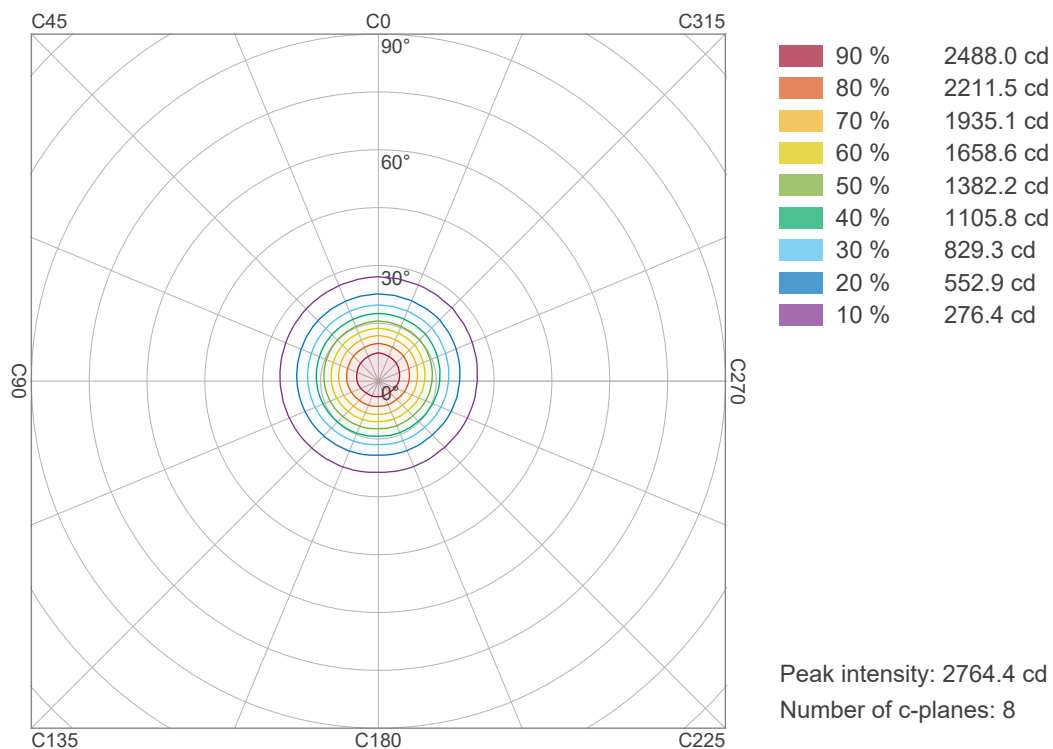

Iso-illuminance Diagram (Iso-lux)

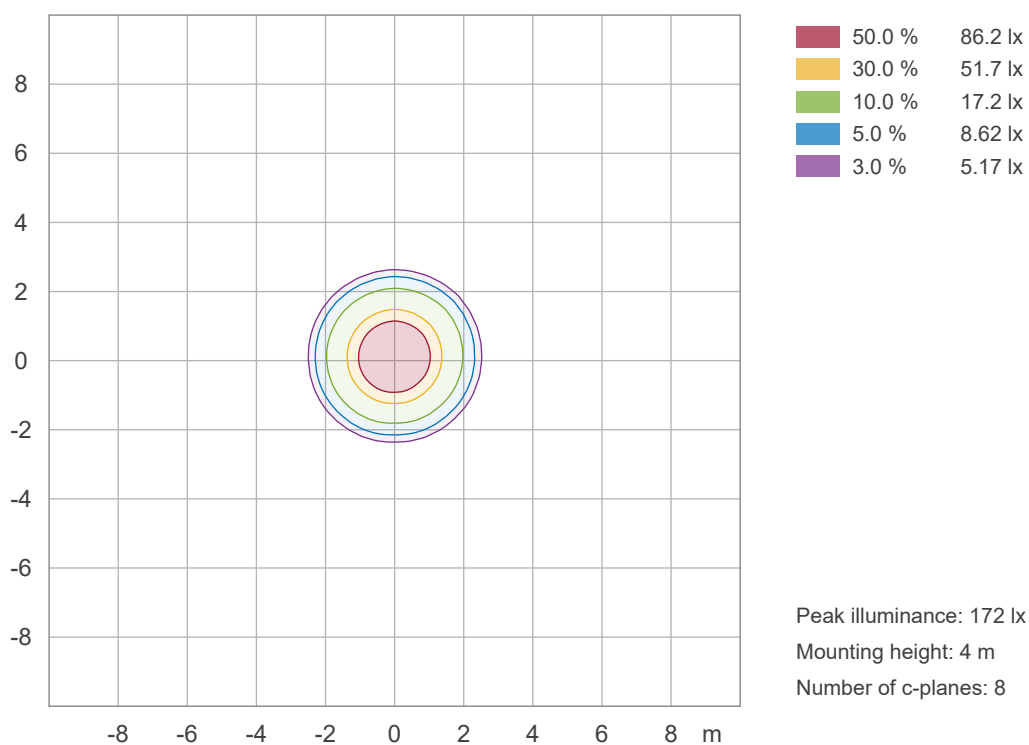


Linear intensity distribution diagram

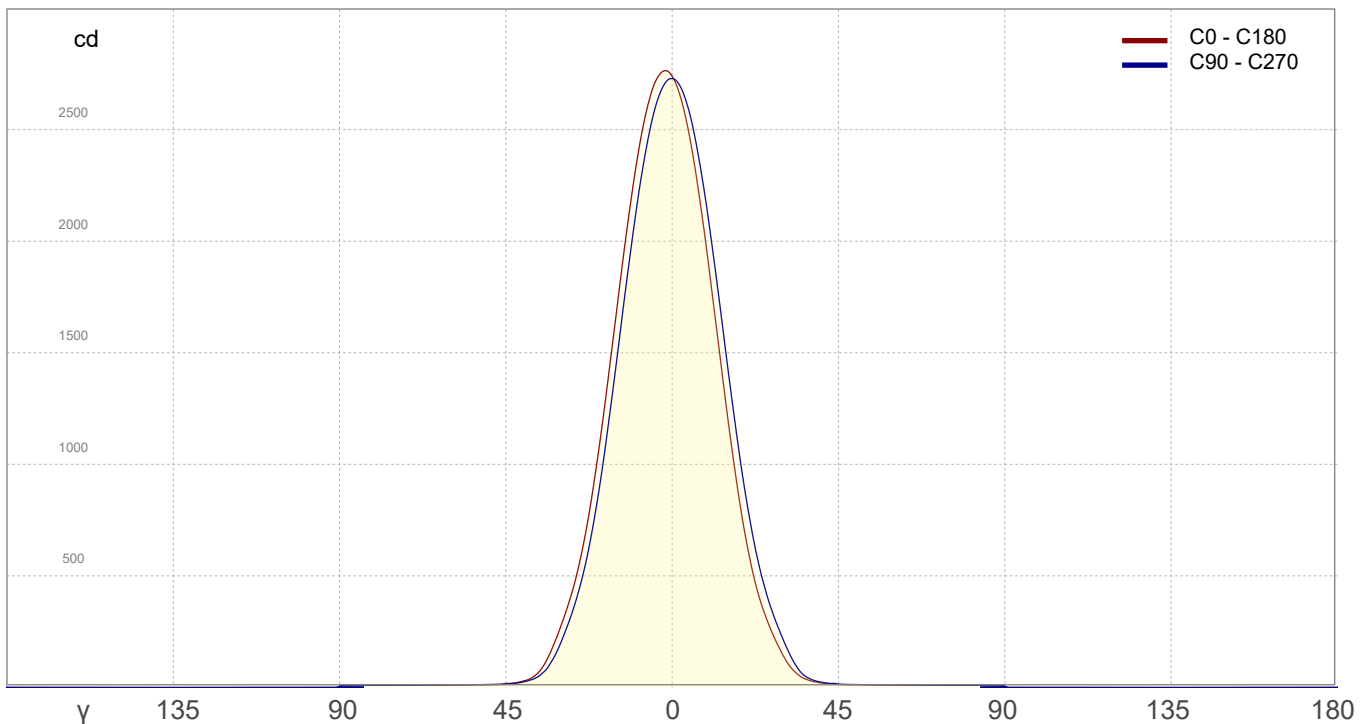

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

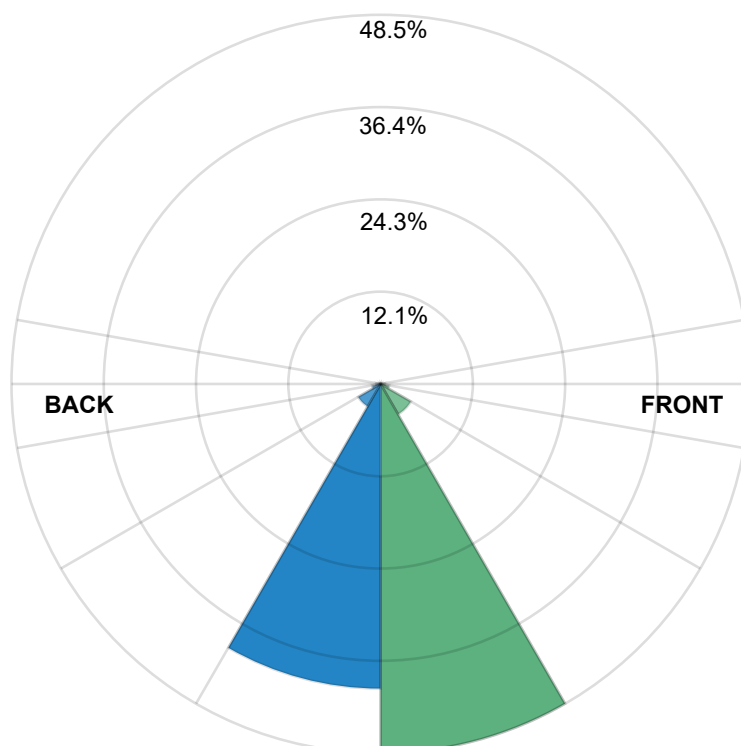

Forward Light

Low (0-30°)	458.5 lm	48.5%
Medium (30-60°)	43.4 lm	4.6%
High (60-80°)	10.8 lm	1.1%
Very High (80-90°)	5.4 lm	0.6%

Back Light

Low (0-30°)	378.4 lm	40.1%
Medium (30-60°)	32.1 lm	3.4%
High (60-80°)	10.7 lm	1.1%
Very High (80-90°)	5.4 lm	0.6%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	944.7 lm	100,0%
-----	----------	--------