



RECESSED ADJUSTABLE SPOT

MON-B.D130-N



Product Summary

High-output recessed adjustable spotlight for premium architectural interiors.

A 30 W recessed LED spotlight with a compact adjustable body and high-output optical system. The Hepburn family combines a classic architectural appearance with modern thermal management, supporting comfortable accent lighting for retail, hospitality, residential, and commercial environments.

POWER

30 W

Luminaire wattage

BEAM

15° / 24° / 36°

Multi-optic family

FLUX

2200 lm

at 3000 K

CRI

Ra ≥ 90

2700 / 3000 / 4000 / 5000 K

CUT-OUT

Ø95 mm

Recessed installation

IP RATING

IP20

Indoor use

Input	AC220-240V 50-60Hz	Output	DC700mA 30V-40V
Light Source	LUMINUS CLM-9AC40 1x30W		
Driver	LS-40-700LI2		
Colors	White / Black		
Net Weight	0.31 kg / pc		

Technical Data


Luminaire Wattage	30 W
Luminaire Color	White / Black
Light Source	LUMINUS CLM-9AC40 1x30W
Color Temperature	2700 K / 3000 K / 4000 K / 5000 K
Color Rendering Index	Ra ≥ 90
Beam Angle	15° / 24° / 36°
Luminous Flux	2200 lm at 3000 K
Cut-out	Ø95 mm
Driver	LS-40-700LI2
Power Factor	≥ 0.90
Input	AC220-240V 50-60Hz
Output	DC700mA 30V-40V
Class	Class II
IP Degree	IP20
Inner Box	14 x 13 x 18 cm
Carton Size	41 x 30 x 38 cm
QTY / CTN	30 pcs / ctn
Net Weight	0.31 kg / pc

Product View



Recessed adjustable spotlight


Dimension Drawing

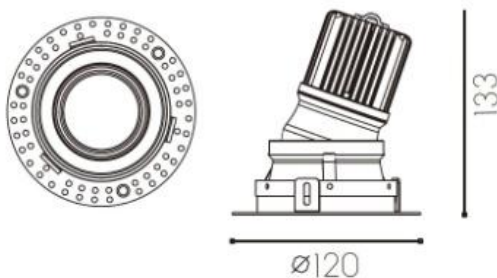


Light Distribution

3000 K photometric reference values for the available optical beam options.

3000 K 15° / 24°

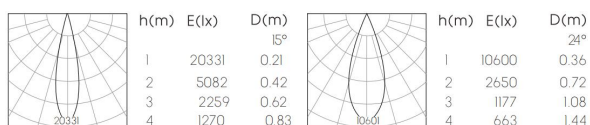

3000 K 36°

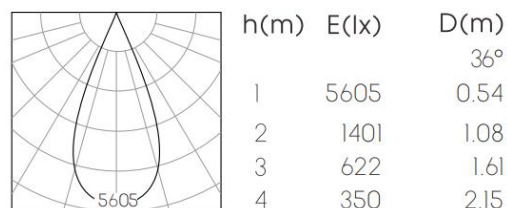

Optional Accessories



Honeycomb

Size: 52 x 3



Combed Glass

Size: 52 x 3



Woven Glass

Size: 52 x 3

Baffle Colors & Control



White

Silver

Golden

Golden

Silver

White



Power Supply

Constant current

Triac / 0-10V / DALI

CE

RoHS

REACH

CCC

Project Reference

Application imagery retained as reference. Branding removed.

