



RECESSED DOWNLIGHT

MON-SB2206-C



Product Summary

Compact recessed architectural downlight for premium indoor lighting applications.

A compact 6 W recessed spotlight with modular optical options for direct lighting, accent lighting, and wall-washing applications. The dark-light reflector concept supports visual comfort, while high-CRI light output makes the product suitable for hospitality, residential, retail, and architectural interiors.

POWER

6 W
Luminaire wattage

BEAM

15° / 24° / 36° / 55°
Multi-optic family

FLUX

561 lm
at 3000 K

CRI

Ra ≥ 95
2700 / 3000 / 4000 / 5000 K

CUT-OUT

Ø75 mm
Recessed installation

IP RATING

IP20
Indoor use

Input	AC220-240V 50-60Hz	Output	DC150mA 36V
Light Source	HonourTEK HRB0604		
Driver	LS-8-150 S11		
Colors	White / Black		
Net Weight	0.19 kg / pc		

Technical Data


Luminaire Wattage	6 W
Luminaire Color	White / Black
Light Source	HonourTEK HRB0604
Color Temperature	2700 K / 3000 K / 4000 K / 5000 K
Color Rendering Index	Ra ≥ 95
Beam Angle	15° / 24° / 36° / 55°
Luminous Flux	561 lm at 3000 K
Cut-out	Ø75 mm
Driver	LS-8-150 SI1
Power Factor	≥ 0.50
Input	AC220-240V 50-60Hz
Output	DC150mA 36V
Class	Class II
IP Degree	IP20
Inner Box	13 x 13 x 8 cm
Carton Size	41 x 28 x 26 cm
QTY / CTN	18 pcs / ctn
Net Weight	0.19 kg / pc

Product View



Recessed round downlight

Dimension Drawing




Light Distribution

3000 K photometric reference values for the available optical beam options.


3000 K 15°

3000K 15°

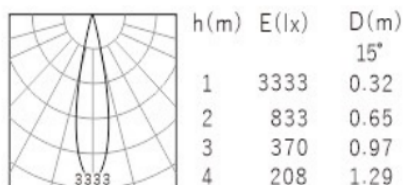


3000 K 24°

3000K 24°

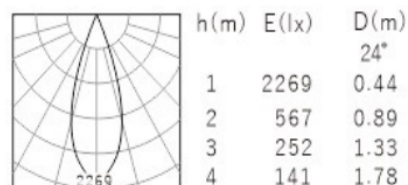


3000 K 36°

3000K 36°

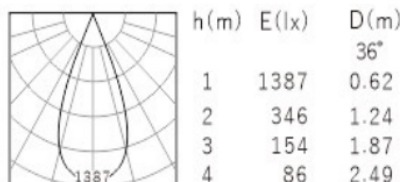

3000 K 55°

3000K 55°

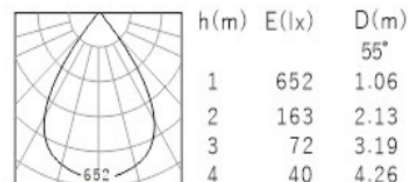

Accessories & Control

Optional Accessories

Honeycomb
Woven Glass
Combed Glass

Power Supply Options

Triac dimming
0-10V control
DALI control

Electrical Class

Class II
Power factor ≥ 0.50
IP20 indoor