


Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	6/25/2026

Tested c-planes	12
Tested gamma angles	$181 - 1.00^\circ$
Input Power	14.66 W

Luminaire	2021/12/3 18:50:19
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Output	—	Total Lumen (Up% / Down%)	895.7 lm	—	0.0008% / 100%
Efficiency			61.1 lm/W		
Peak Intensity			5939 cd		
Correlated Color Temperature, CCT			3000 K		
Color Rendering Index			CRI 85.0		

Beam details

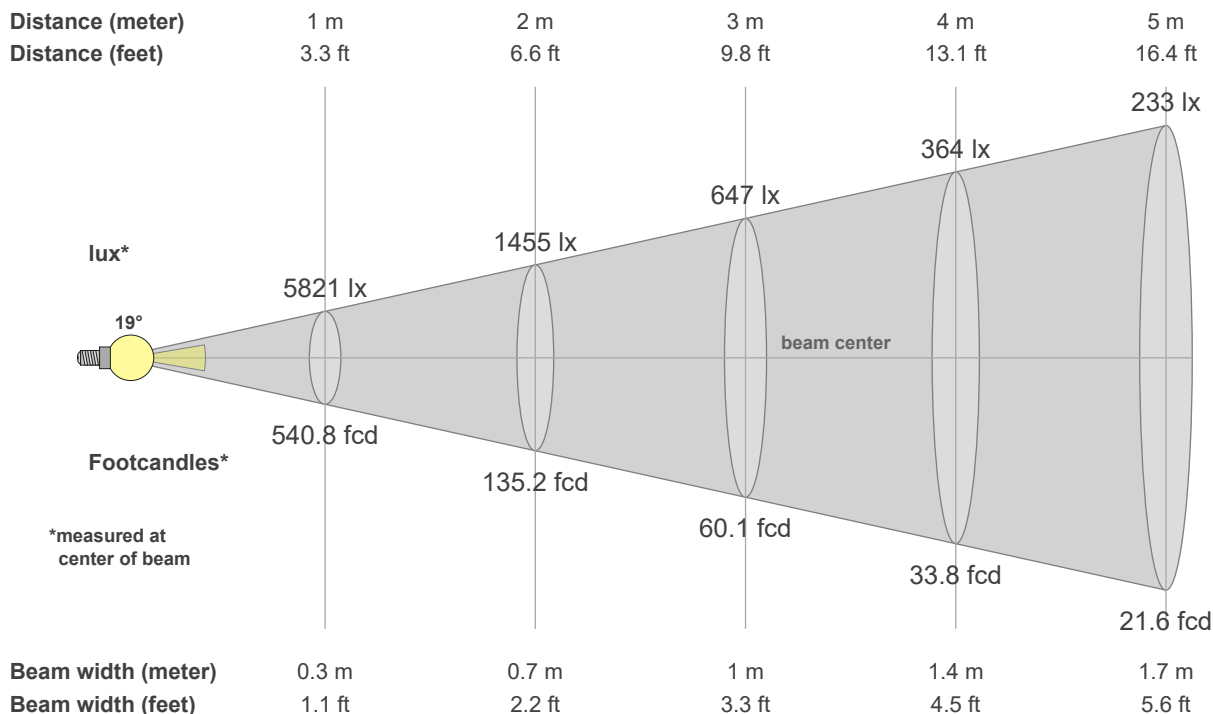


Luminaire budgetary diagram


LAMPS (number of lamps)

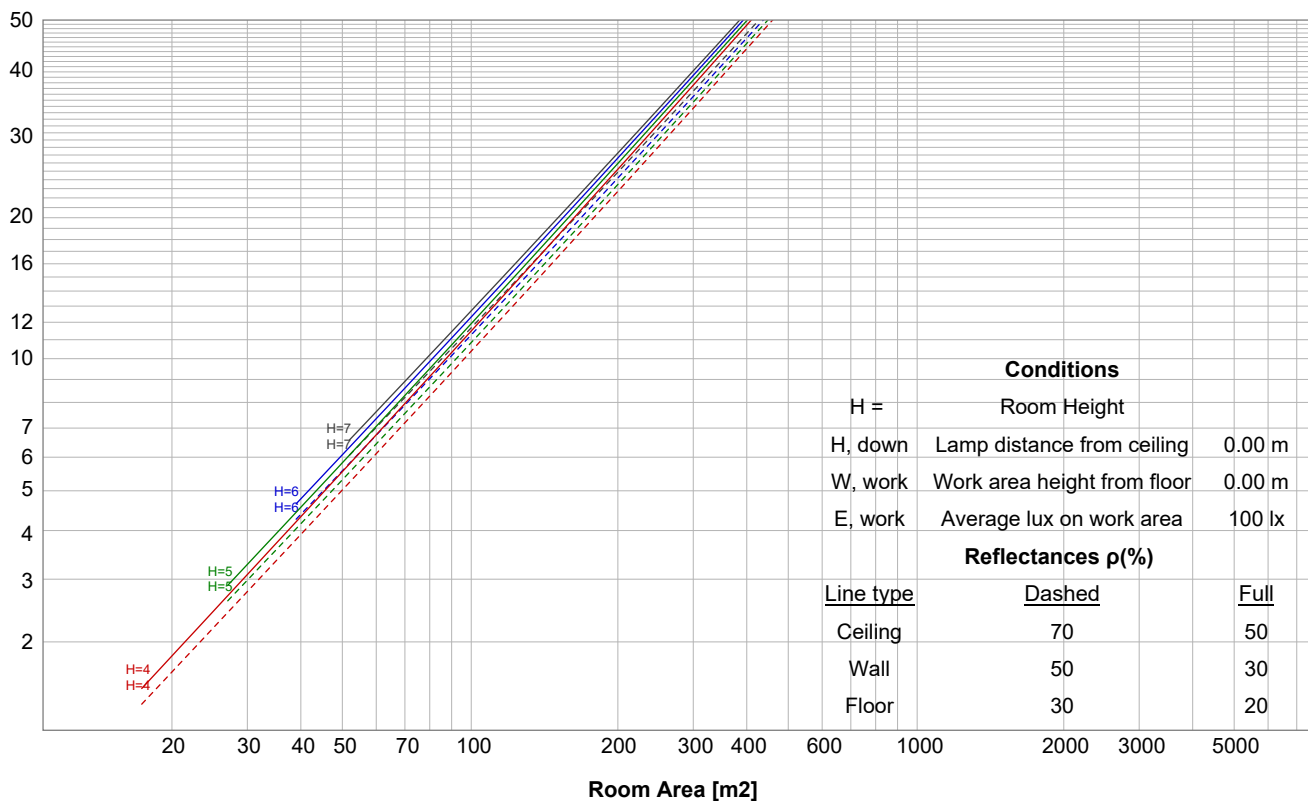


Iso-intensity Diagram (Iso-candela)

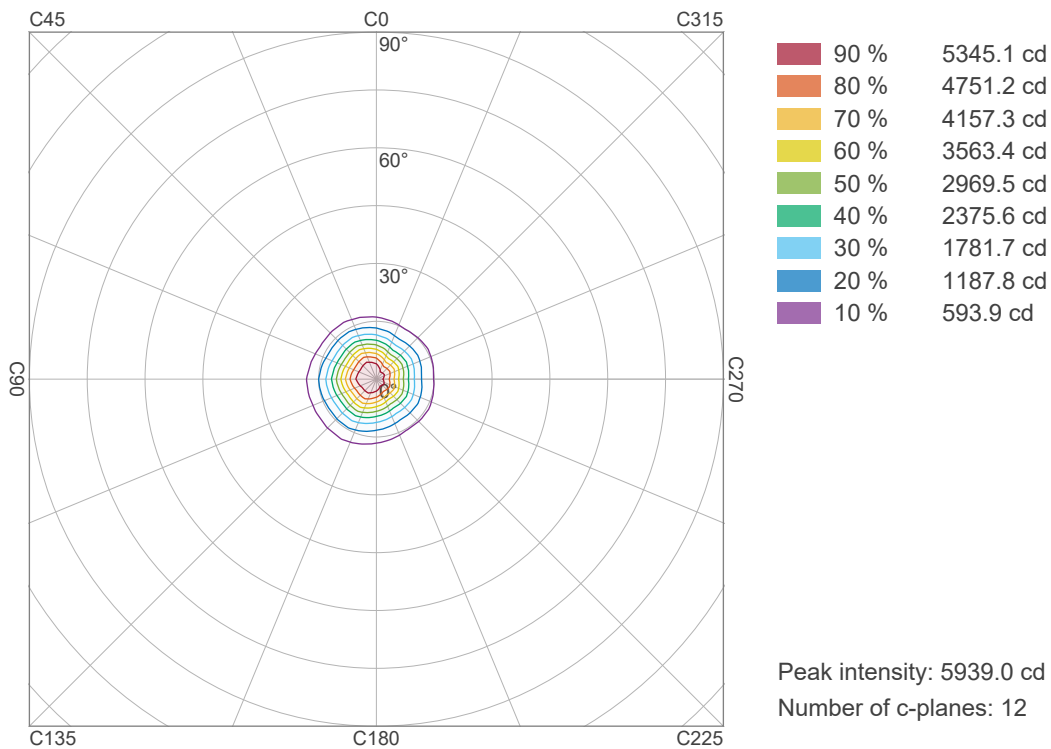

Iso-illuminance Diagram (Iso-lux)

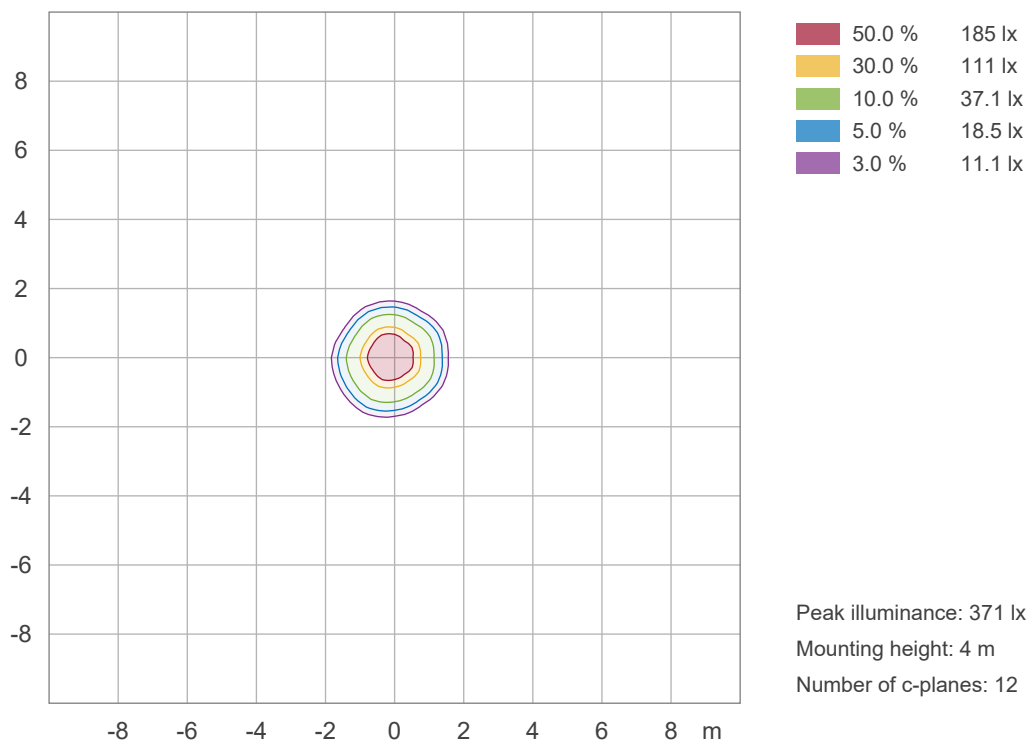


Linear intensity distribution diagram

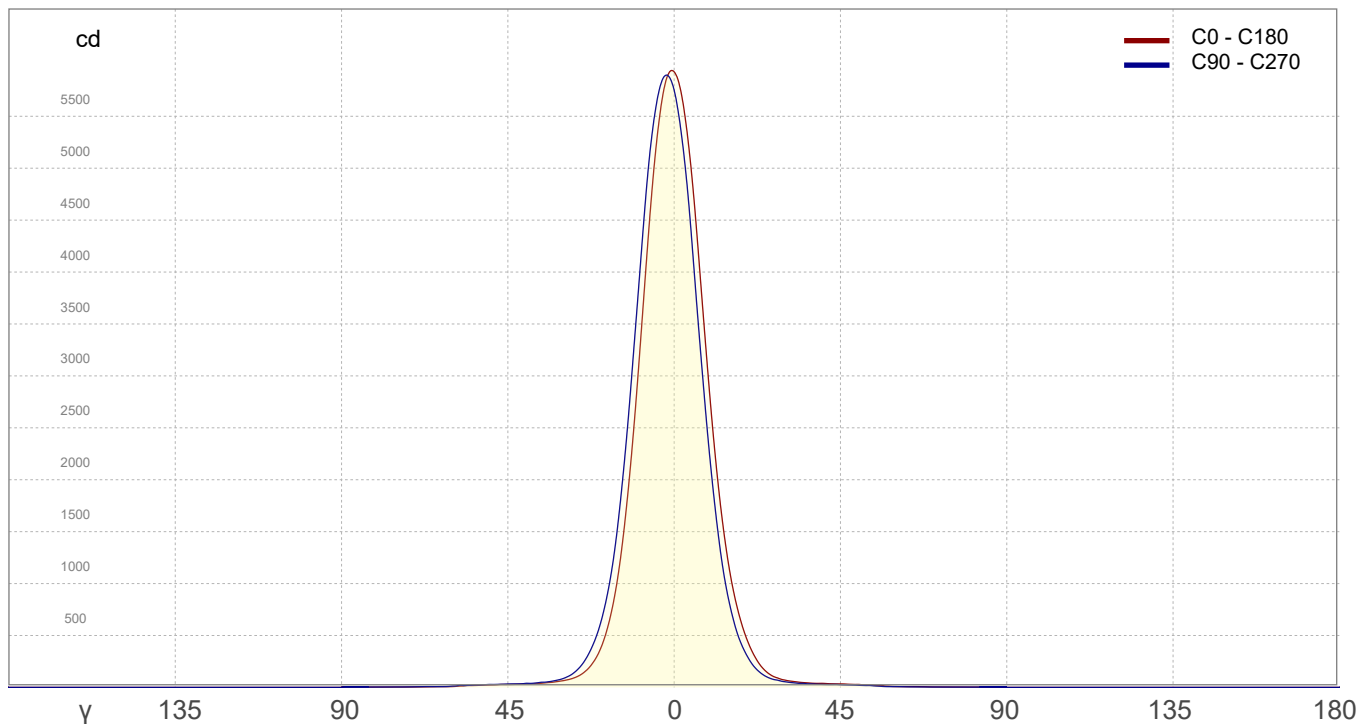

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

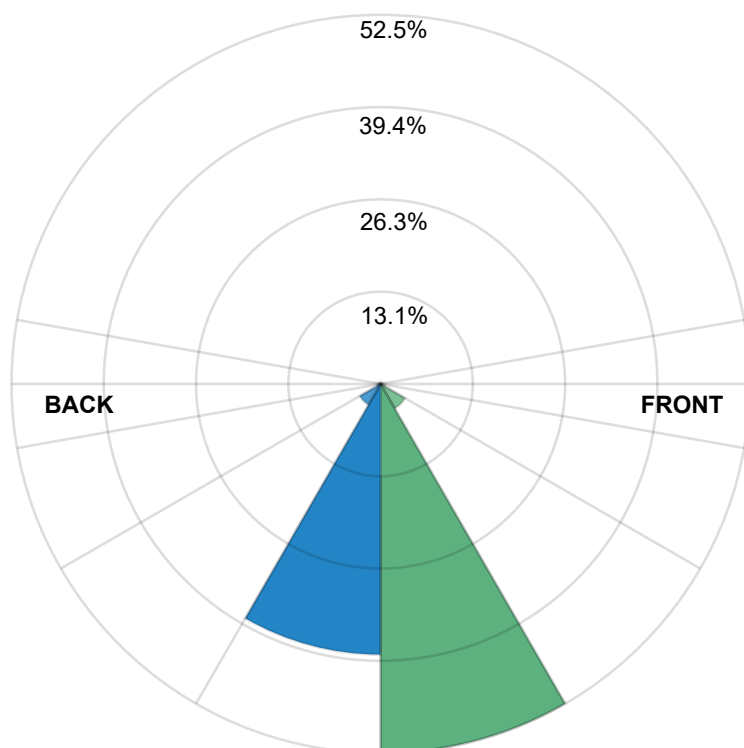

Forward Light

Low (0-30°)	470.7 lm	52.5%
Medium (30-60°)	36.1 lm	4.0%
High (60-80°)	5.4 lm	0.6%
Very High (80-90°)	1.5 lm	0.2%

Back Light

Low (0-30°)	345.0 lm	38.5%
Medium (30-60°)	30.7 lm	3.4%
High (60-80°)	4.8 lm	0.5%
Very High (80-90°)	1.5 lm	0.2%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	895.7 lm	100,0%
-----	----------	--------