


Test lab	n/a
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	7/14/2026

Tested c-planes	12
Tested gamma angles	$181 - 1.00^\circ$
Input Power	23.81 W

Luminaire	2023/5/10 15:02:29
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Output — Total Lumen (Up% / Down%)	2496 lm — 0.001% / 100%
Efficiency	104.8 lm/W
Peak Intensity	8663 cd
Correlated Color Temperature, CCT	2700 K
Color Rendering Index	CRI 85.0

Beam details

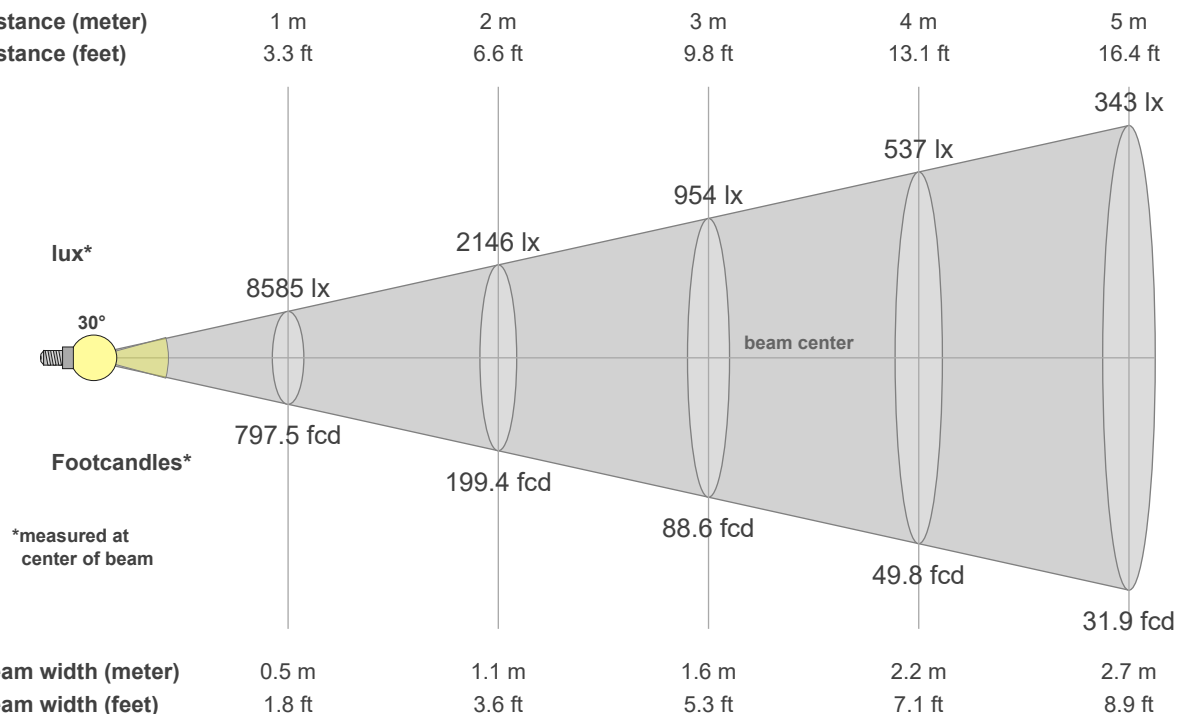


Luminaire budgetary diagram


LAMPS (number of lamps)

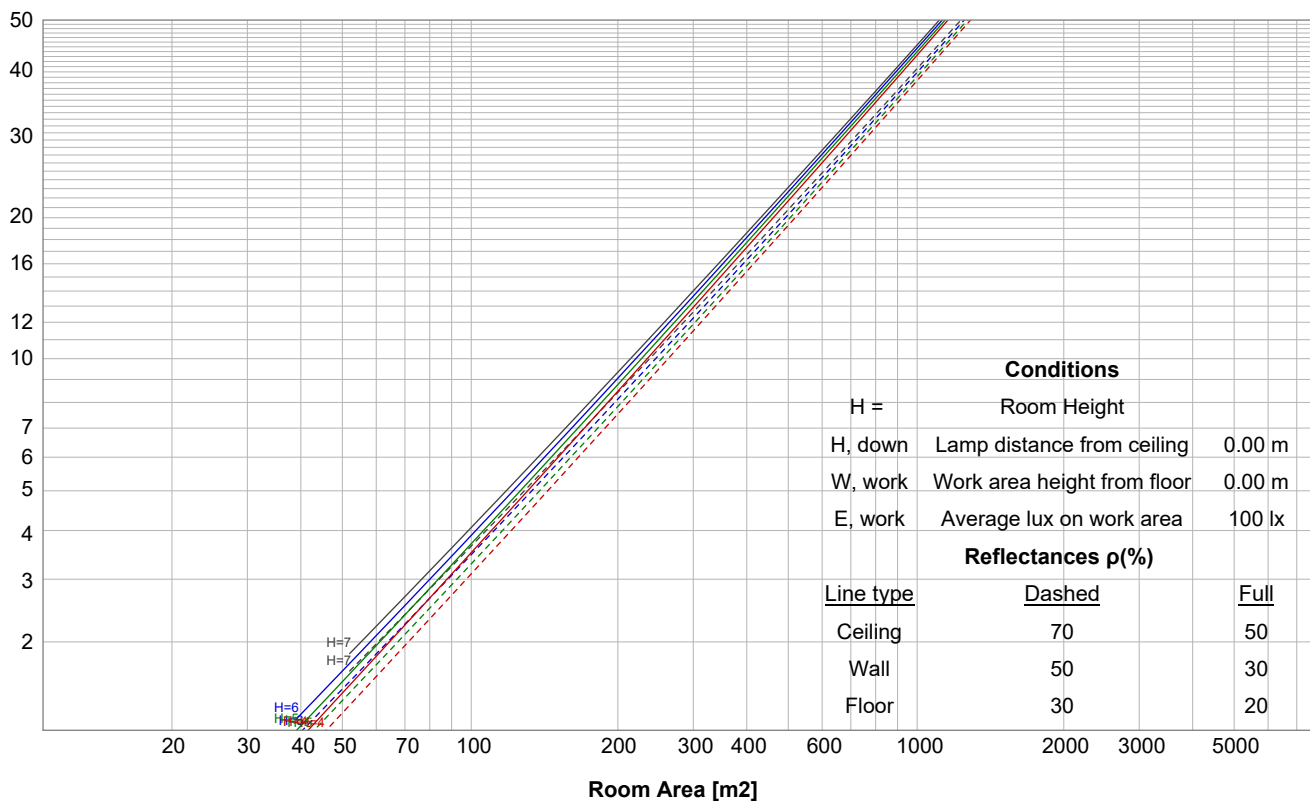


Iso-intensity Diagram (Iso-candela)

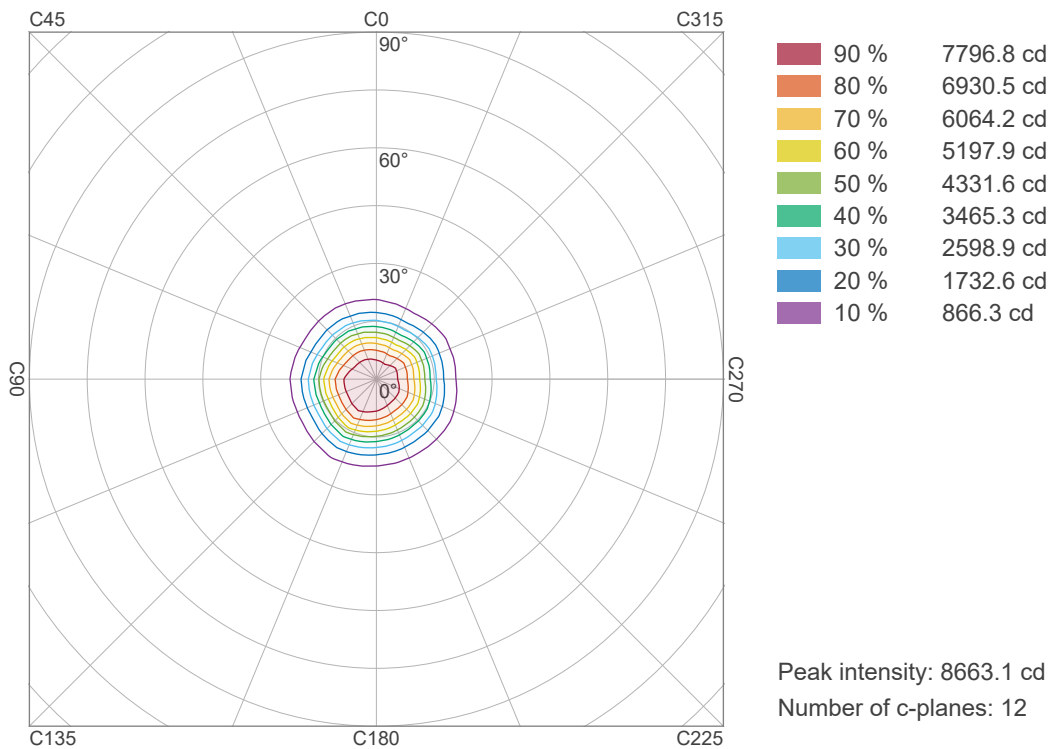

Iso-illuminance Diagram (Iso-lux)

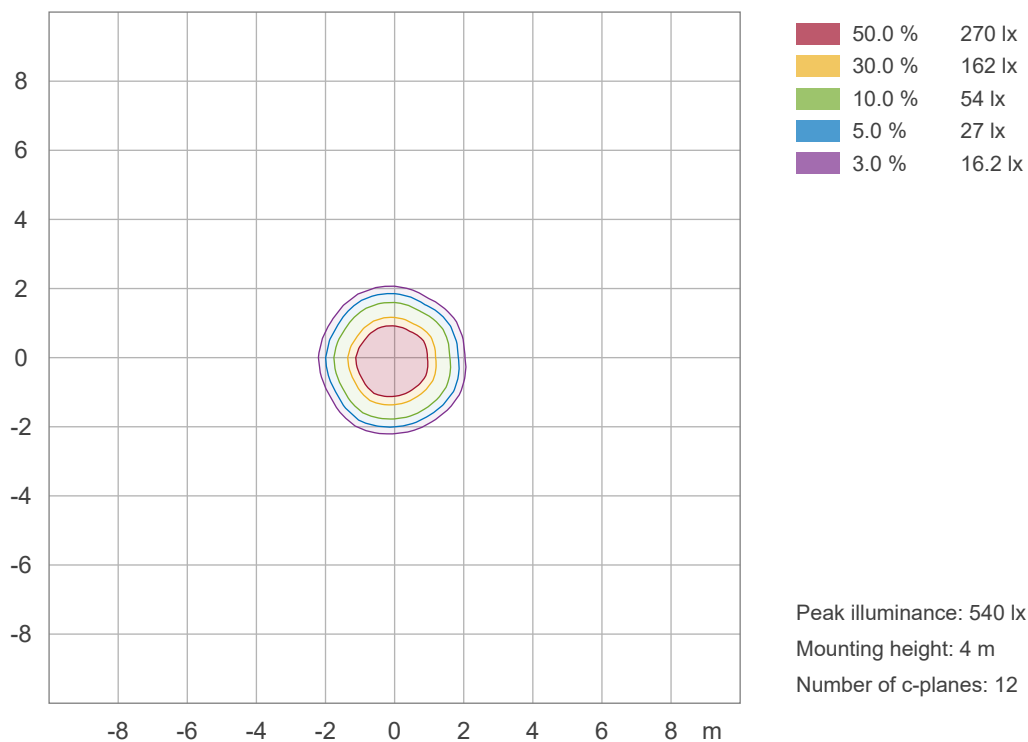


Linear intensity distribution diagram

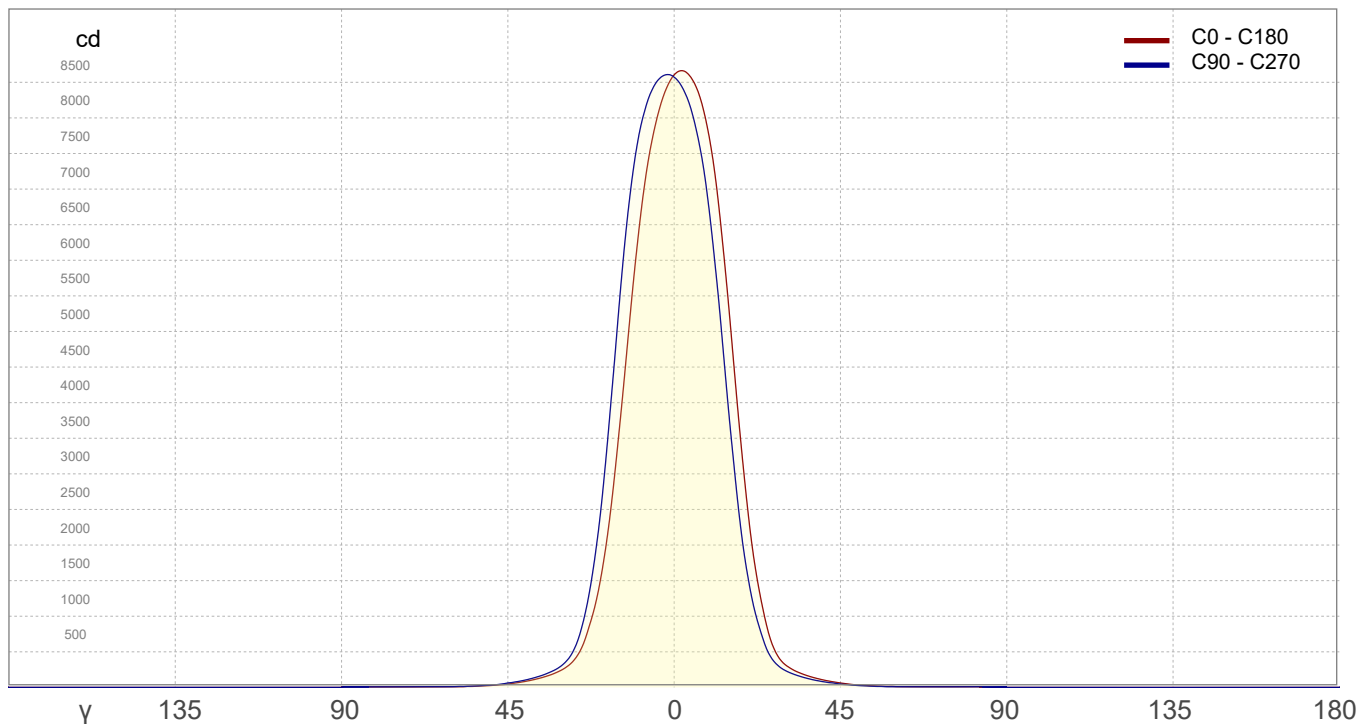

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B3 U0 G0

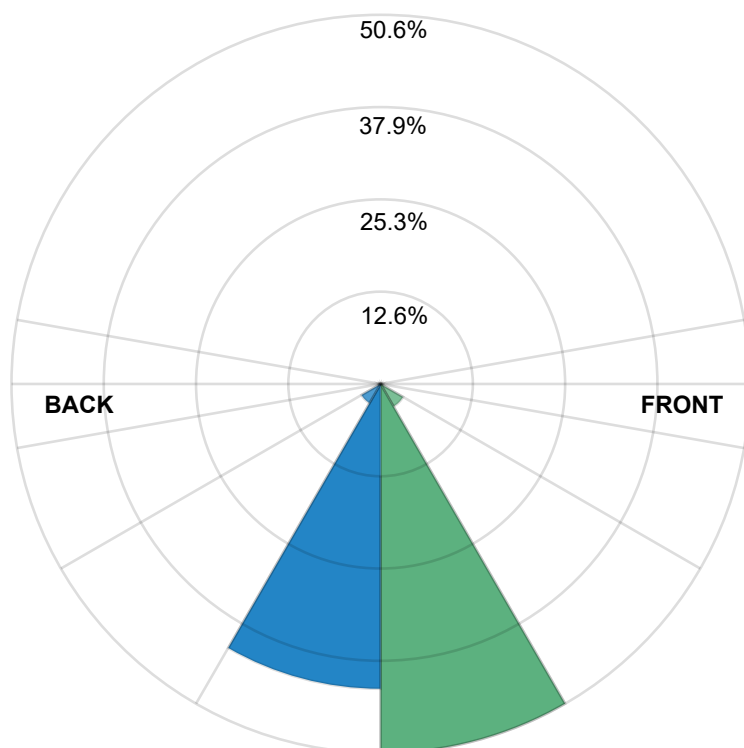

Forward Light

Low (0-30°)	1262.8 lm	50.6%
Medium (30-60°)	88.8 lm	3.6%
High (60-80°)	9.0 lm	0.4%
Very High (80-90°)	4.5 lm	0.2%

Back Light

Low (0-30°)	1042.7 lm	41.8%
Medium (30-60°)	75.5 lm	3.0%
High (60-80°)	8.5 lm	0.3%
Very High (80-90°)	4.3 lm	0.2%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	2496.1 lm	100,0%
-----	-----------	--------