



## MON-SF2206-N

Fixed Recessed Spotlight

✓ CE Certified

✓ RoHS Compliant



✓ Flicker-free

### SPOTLIGHT PARAMETERS Product Specification


|                        |                                  |
|------------------------|----------------------------------|
| Light Source           | Osram LED module                 |
| Power                  | 6 W                              |
| Luminous Flux          | 424 lm (3000K)                   |
| Light Effect           | 70.7 lm/W                        |
| Colour Rendering Index | Ra ≥ 90                          |
| Colour Temperature     | 2700 / 3000 / 4000 / 5000K       |
| Beam Angle             | 80°                              |
| Driver                 | LS-8-150 SI ECO · PF ≥ 0.50      |
| Input / Output         | AC 220-240V 50-60Hz · DC 150mA   |
| Protection / Class     | IP20 · Class II · Cut-out Ø75 mm |

### ACCESSORIES Options


- ☐ White housing
- ☒ Black housing
- ☐ Dimmable driver: Triac / 0-10V / DALI
- ☐ Optional lens / anti-glare accessories



### COLOR TEMPERATURE

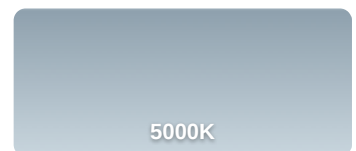


### BEAM ANGLE

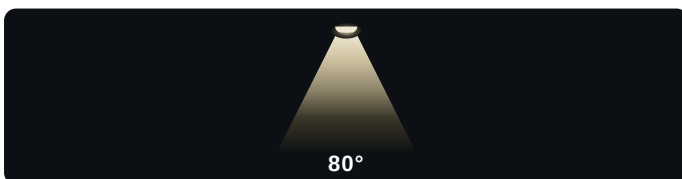

### USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & commercial spaces
- HOTEL** Hospitality & galleries

### DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



Ceiling cut-out: Ø75 mm  
Inner box: 10 × 10 × 7.5 cm  
Carton: 42 × 32 × 30 cm · 48 pcs/ctn  
Net weight: 0.17 kg/pc