

Laboratory and Equipment

Test lab	Moon On Noon
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	8/21/2026

Measurement Conditions

Tested c-planes	8
Tested gamma angles	181 – 1.00°
Input Power	7.17 W


Tested Light Source

Luminaire	MON-SLL2206-N
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	302 lm – 0.0002% / 100%
Efficiency	42.11 lm/W
Peak Intensity	706.5 cd
Correlated Color Temperature, CCT	3000 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

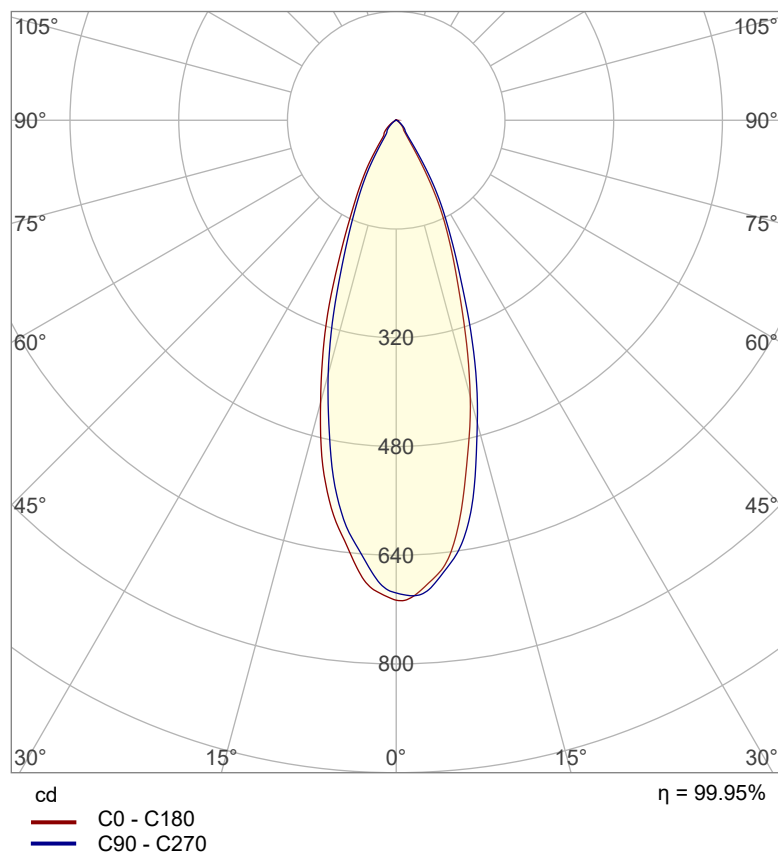


Beam details

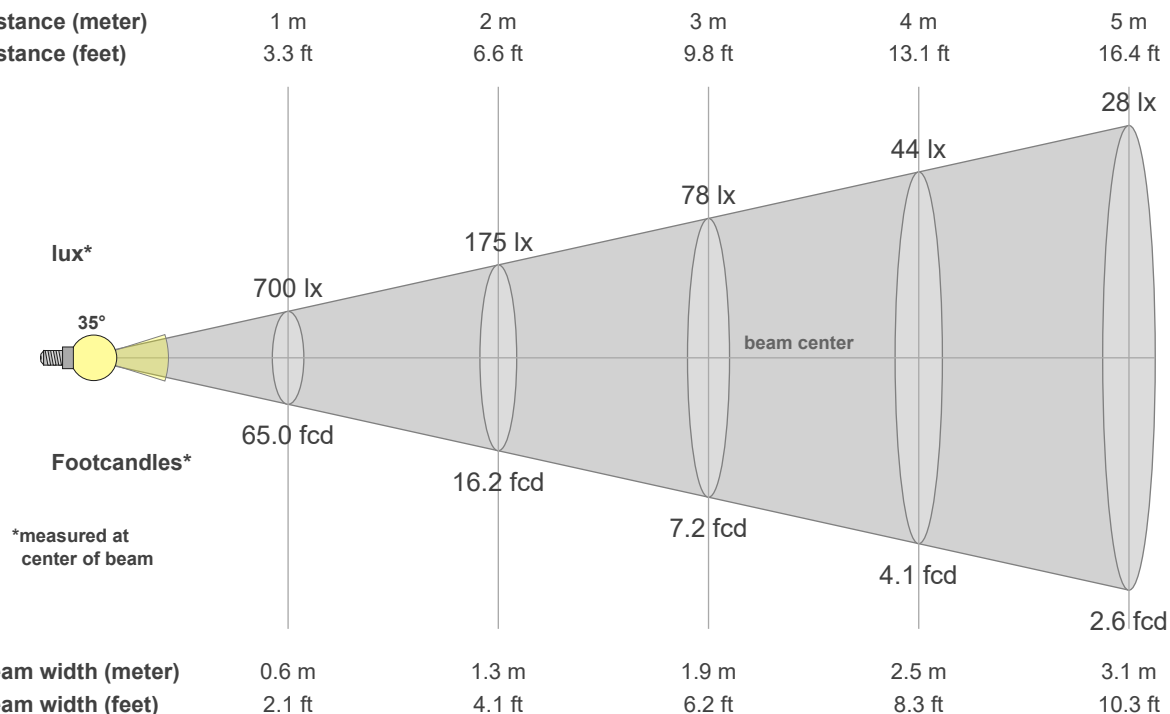


Luminaire budgetary diagram


LAMPS (number of lamps)

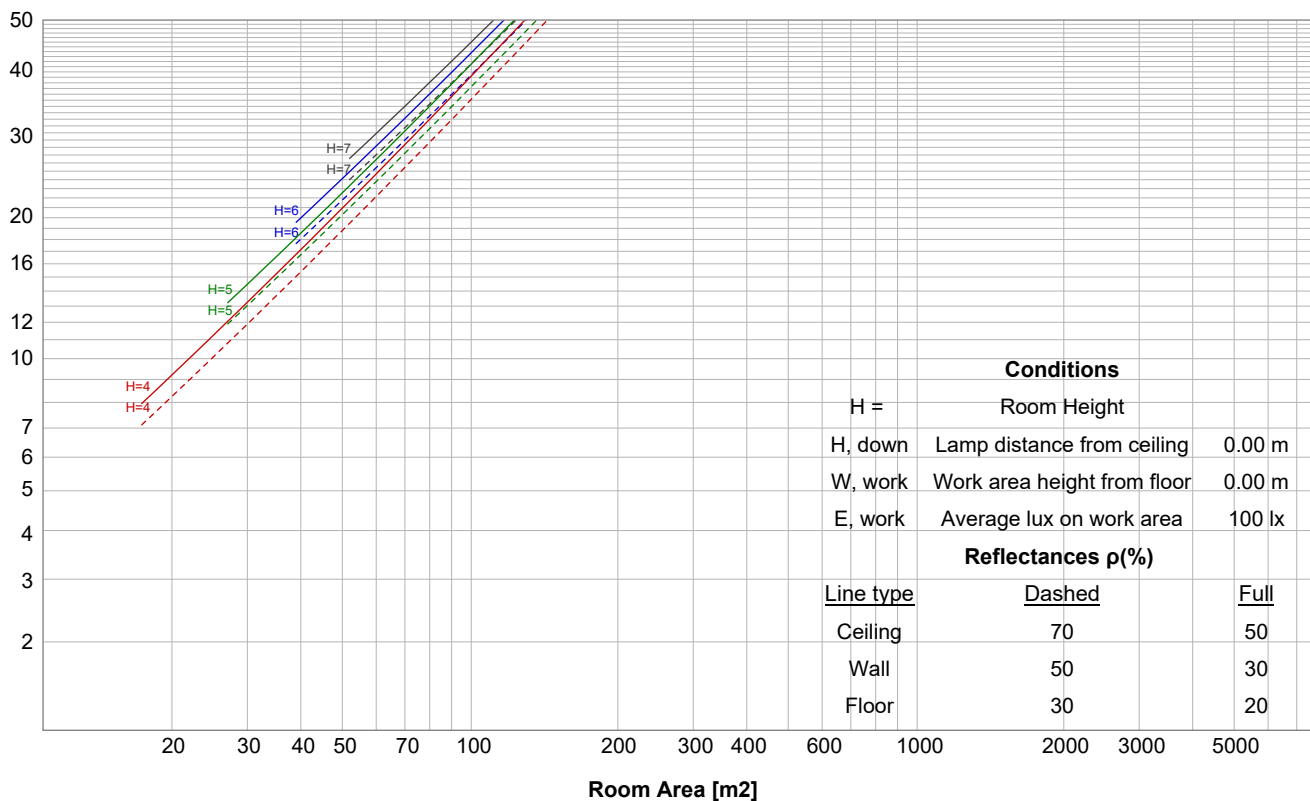


Iso-intensity Diagram (Iso-candela)

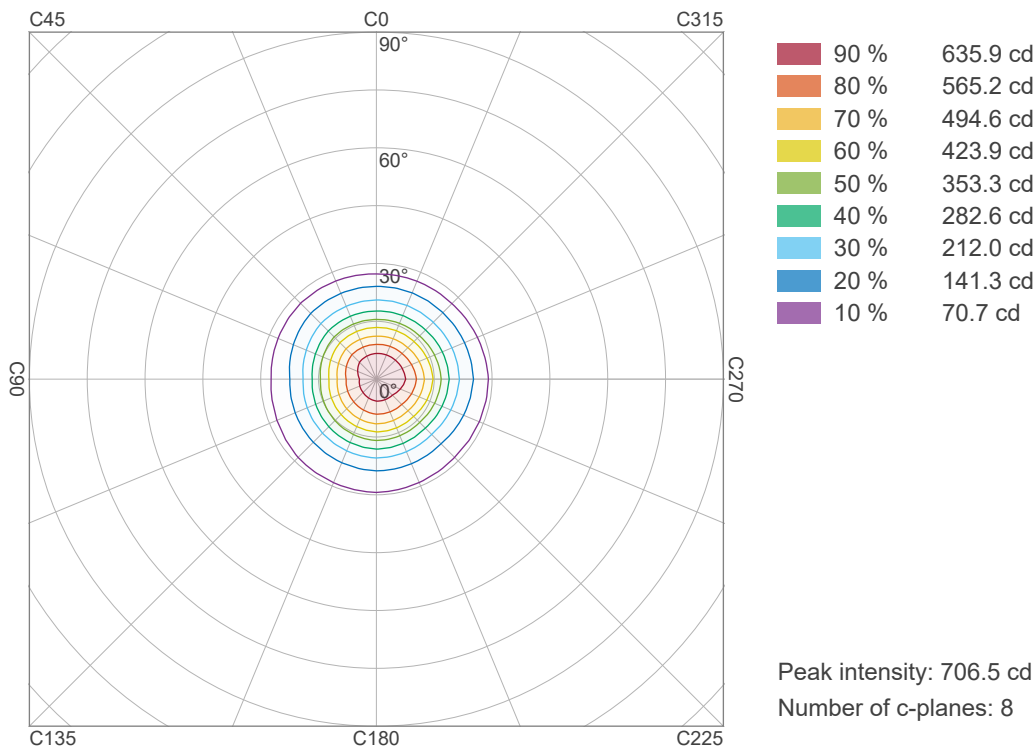

Iso-illuminance Diagram (Iso-lux)

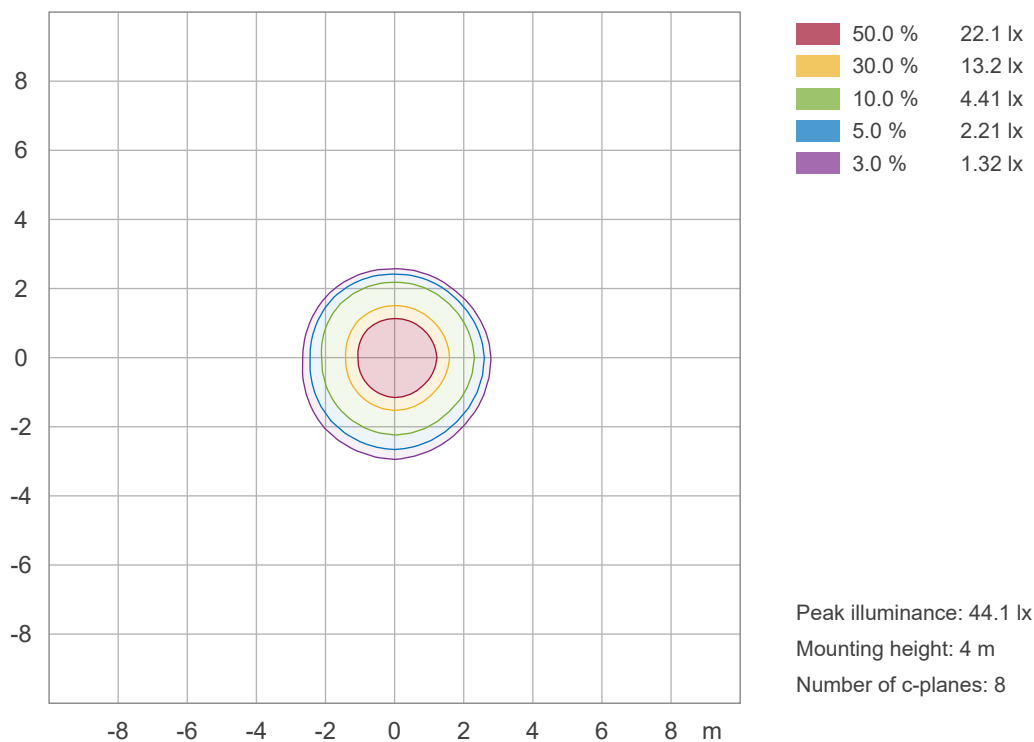


Linear intensity distribution diagram

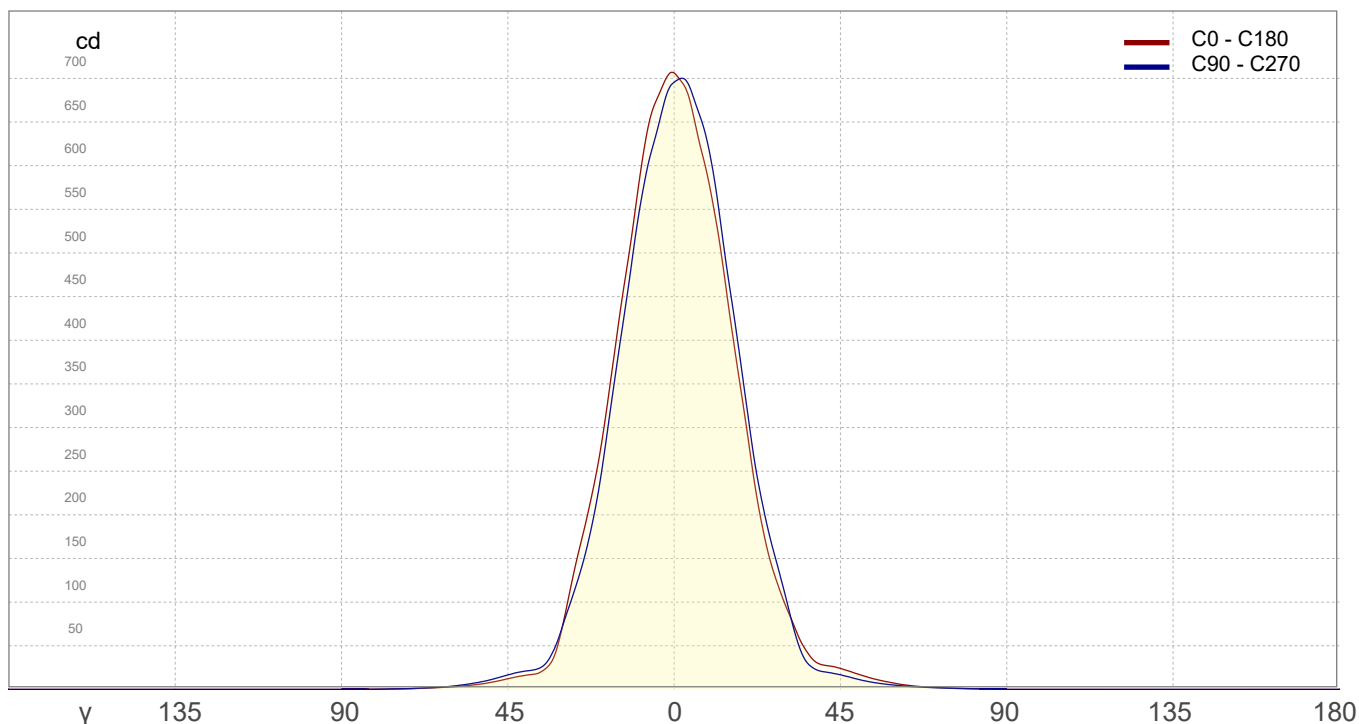

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

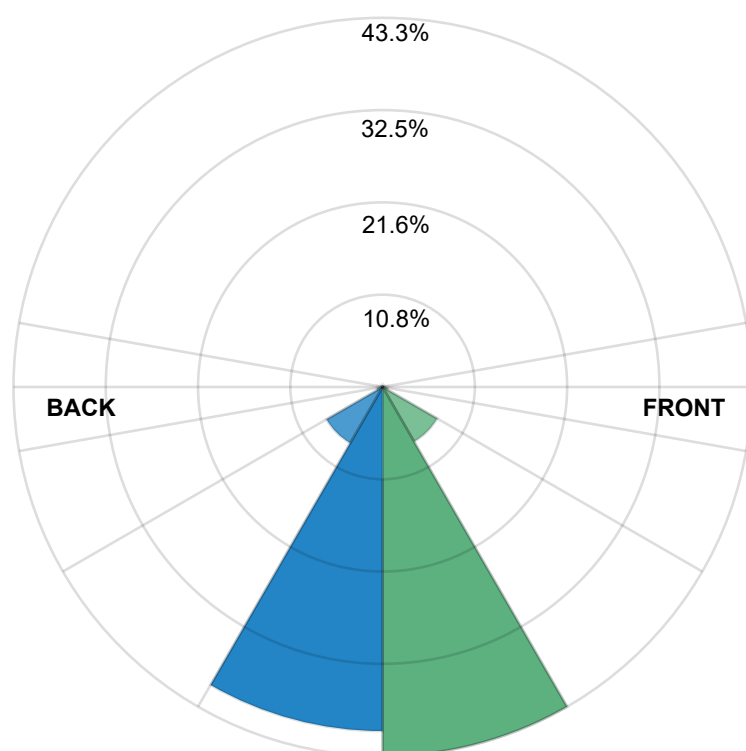

Forward Light

Low (0-30°)	130.7 lm	43.3%
Medium (30-60°)	22.3 lm	7.4%
High (60-80°)	1.9 lm	0.6%
Very High (80-90°)	0.2 lm	0.1%

Back Light

Low (0-30°)	121.8 lm	40.3%
Medium (30-60°)	22.9 lm	7.6%
High (60-80°)	2.0 lm	0.7%
Very High (80-90°)	0.2 lm	0.1%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	302.0 lm	100,0%
-----	----------	--------