


Test lab	Moon On Noon
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	8/21/2026

Tested c-planes	12
Tested gamma angles	181 – 1.00°
Input Power	6.75 W

Luminaire	MON-SS2206-N
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	Moon On Noon


Output — Total Lumen (Up% / Down%)	477.8 lm — 0.0005% / 100%
Efficiency	70.79 lm/W
Peak Intensity	1405 cd
Correlated Color Temperature, CCT	3000 K
Color Rendering Index	CRI 85.0

Beam details

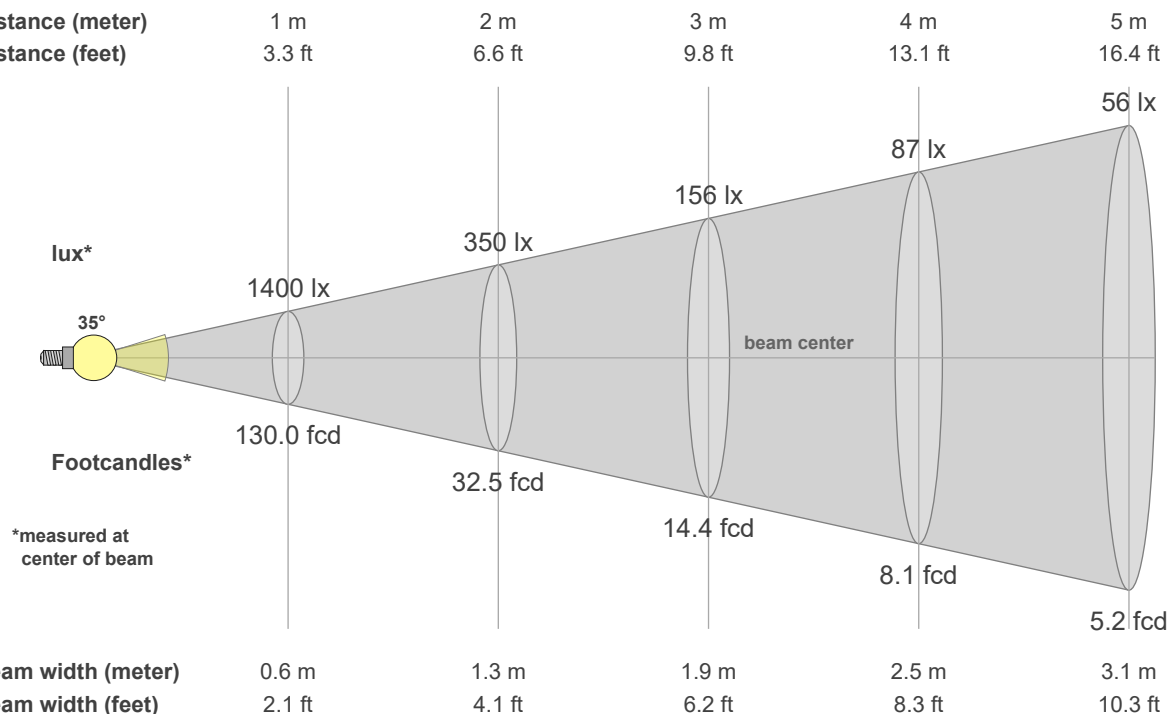


Luminaire budgetary diagram


LAMPS (number of lamps)

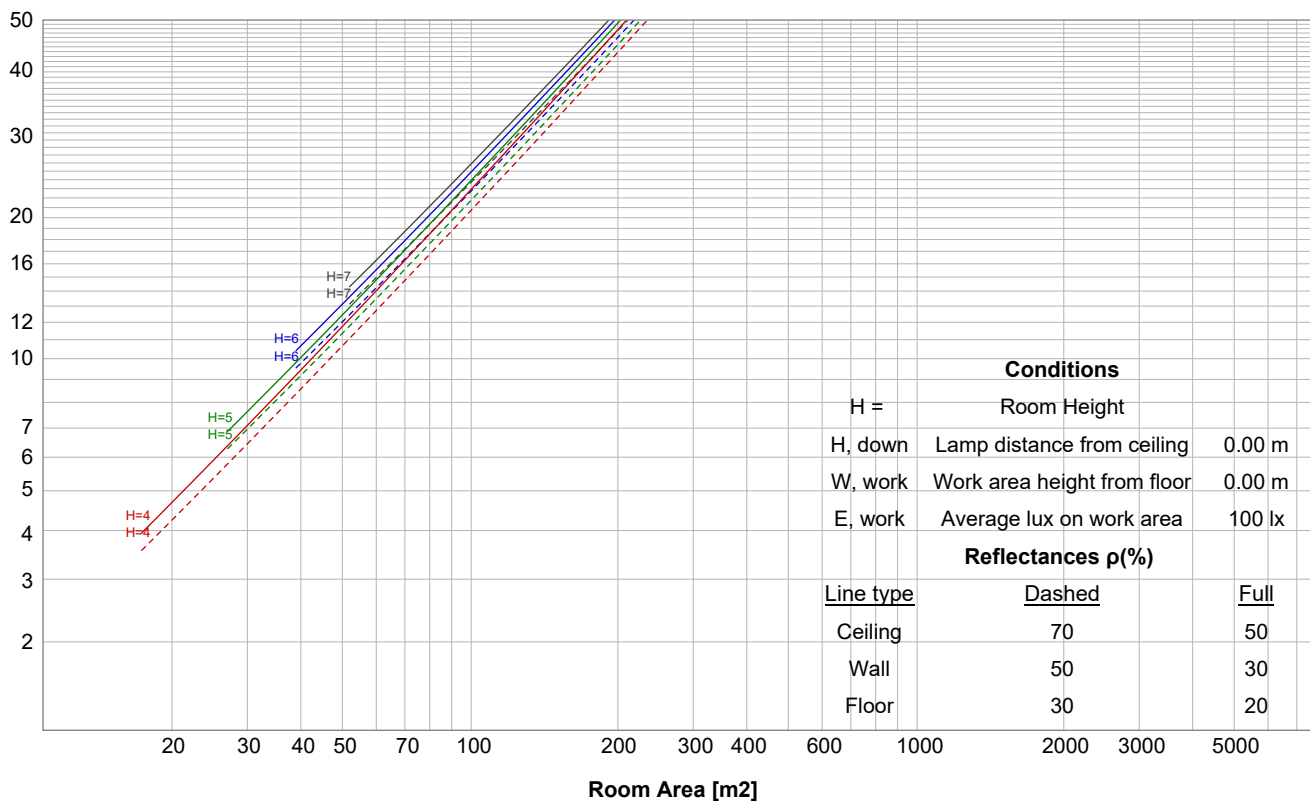


Iso-intensity Diagram (Iso-candela)

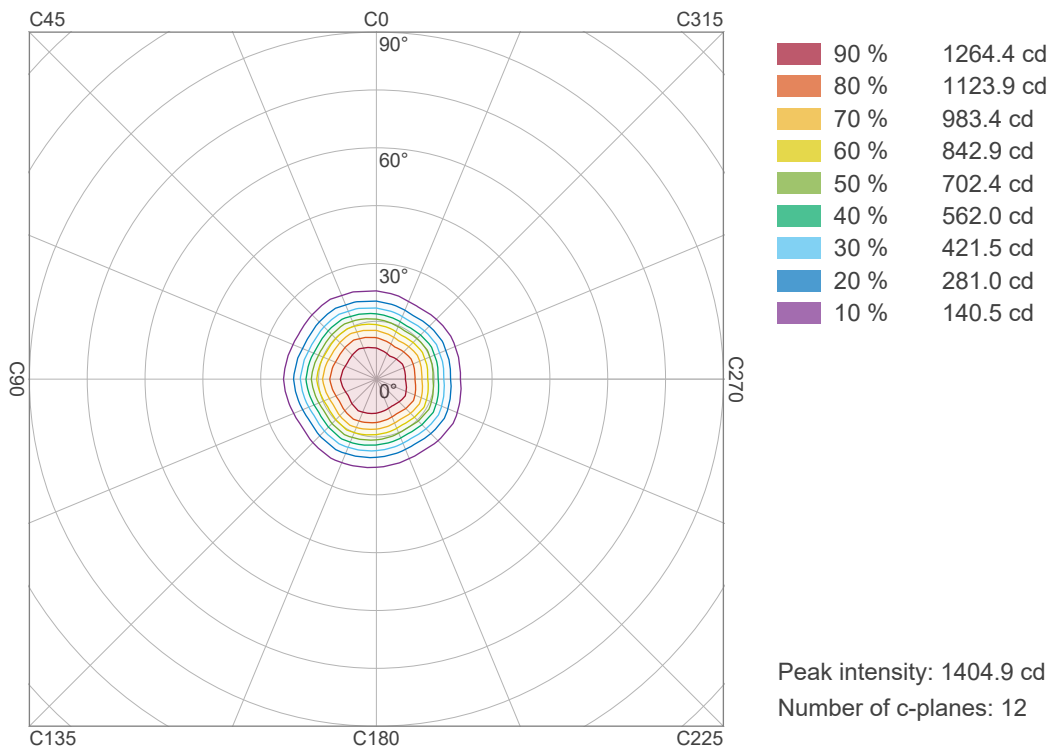

Iso-illuminance Diagram (Iso-lux)

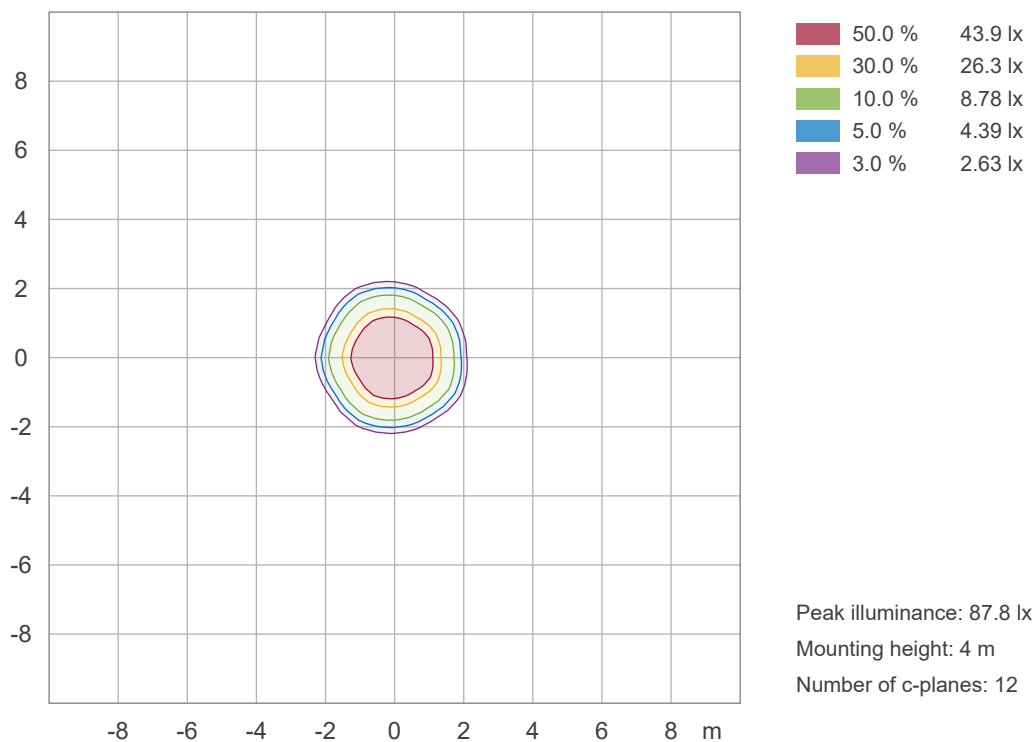


Linear intensity distribution diagram

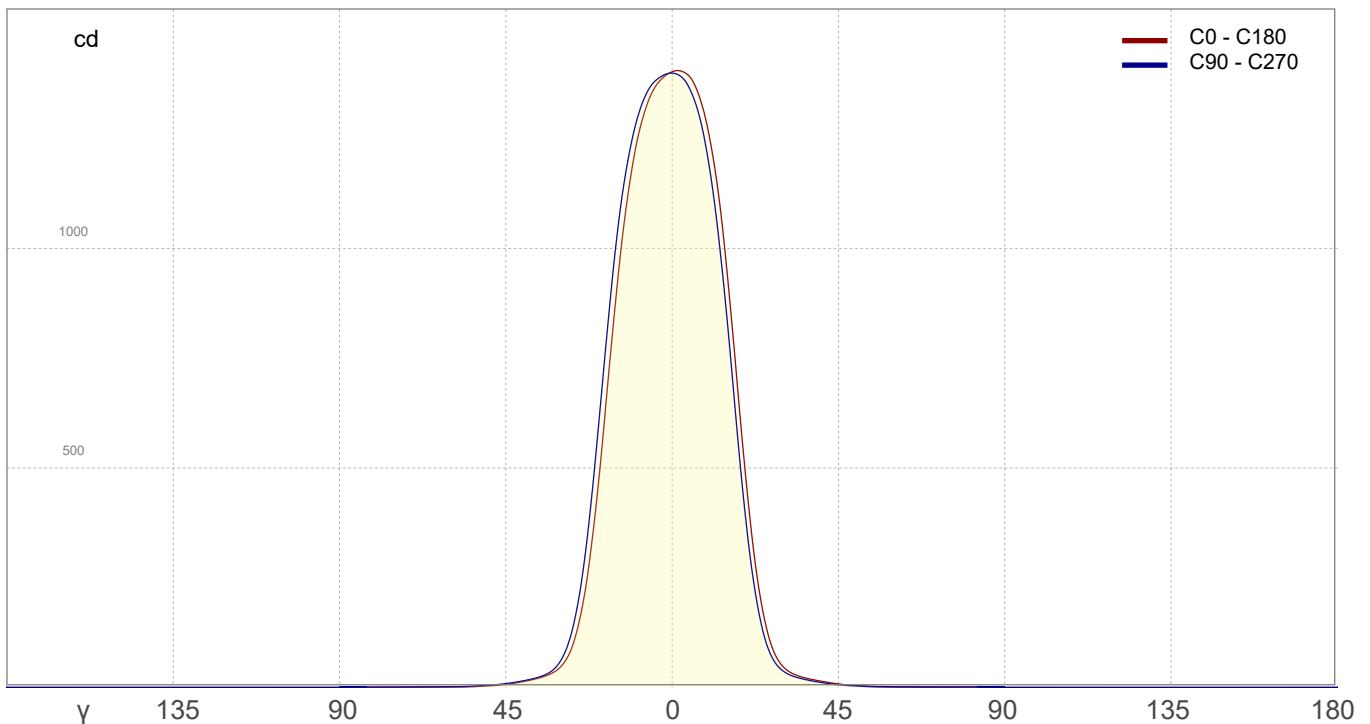

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

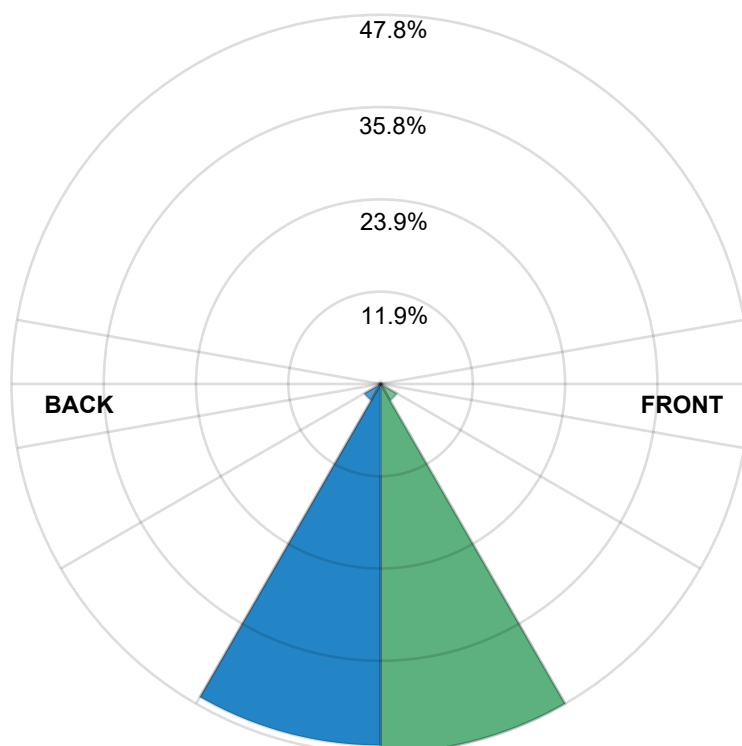

Forward Light

Low (0-30°)	228.3 lm	47.8%
Medium (30-60°)	11.7 lm	2.4%
High (60-80°)	0.9 lm	0.2%
Very High (80-90°)	0.4 lm	0.1%

Back Light

Low (0-30°)	223.6 lm	46.8%
Medium (30-60°)	11.7 lm	2.4%
High (60-80°)	0.8 lm	0.2%
Very High (80-90°)	0.4 lm	0.1%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	477.8 lm	100,0%
-----	----------	--------