



# MON-SW2203-N

Zoomable Recessed Spotlight

✓ CE Certified

✓ RoHS Compliant

✓ Flicker-free

## SPOTLIGHT PARAMETERS Product Specification

|                        |                                  |
|------------------------|----------------------------------|
| Light Source           | Luminus SST20 LED module         |
| Power                  | 3 W                              |
| Luminous Flux          | 164 lm (3000K)                   |
| Light Effect           | 54.7 lm/W                        |
| Colour Rendering Index | Ra ≥ 95                          |
| Colour Temperature     | 2700 / 3000 / 4000 / 5000K       |
| Beam Angle             | 12° - 40° (Zoom)                 |
| Driver                 | LS-3-700 SI · PF ≥ 0.50          |
| Input / Output         | AC 220-240V 50-60Hz · DC 700mA   |
| Protection / Class     | IP20 · Class II · Cut-out Ø75 mm |

## ACCESSORIES Options


- ☐ White housing
- ☒ Black housing
- ☐ Dimmable driver: Triac / 0-10V / DALI
- ☐ Zoomable optic 12°–40°



## COLOR TEMPERATURE




## BEAM ANGLE

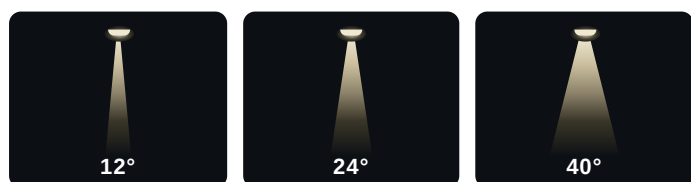

## USAGE SPACES

- HOME** Residential accent lighting
- RETAIL** Shops & commercial spaces
- HOTEL** Hospitality & galleries

## DIMENSIONS & PACKAGING unit: mm (untoleranced dimensions ±0.5 mm)



Ceiling cut-out: Ø75 mm  
Inner box: 10 × 10 × 8.5 cm  
Carton: 42 × 32 × 27.5 cm · 36 pcs/ctn  
Net weight: 0.24 kg/pc