



Beam details

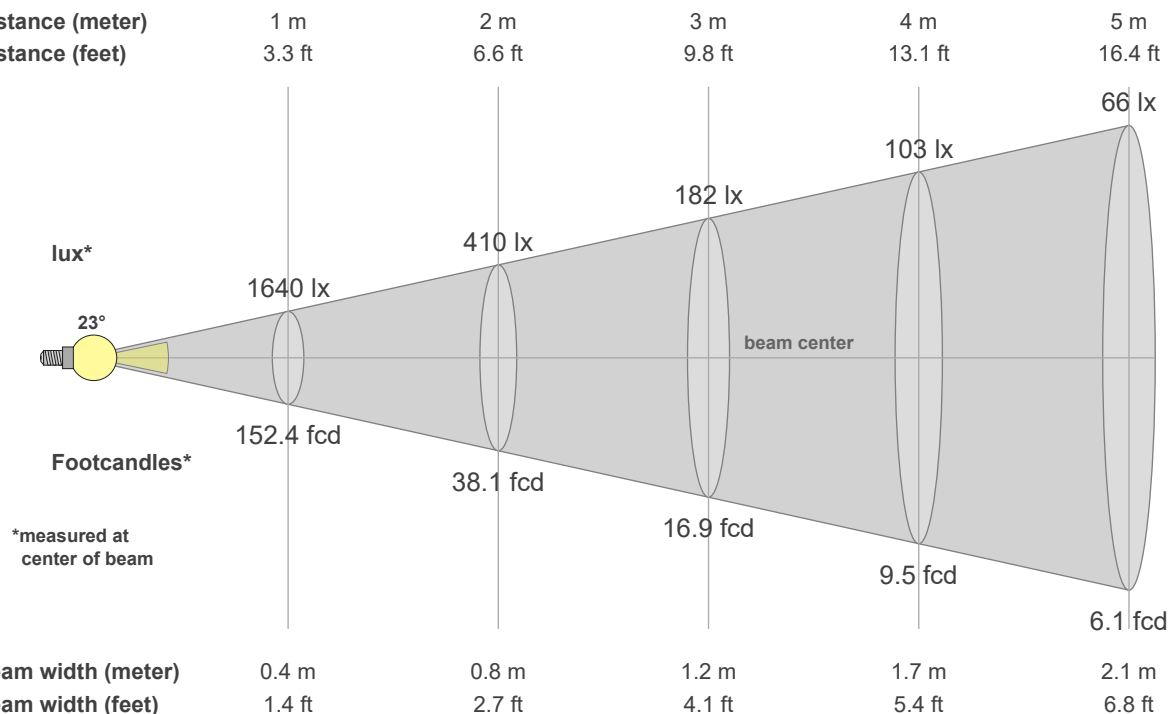


Luminaire budgetary diagram


LAMPS (number of lamps)

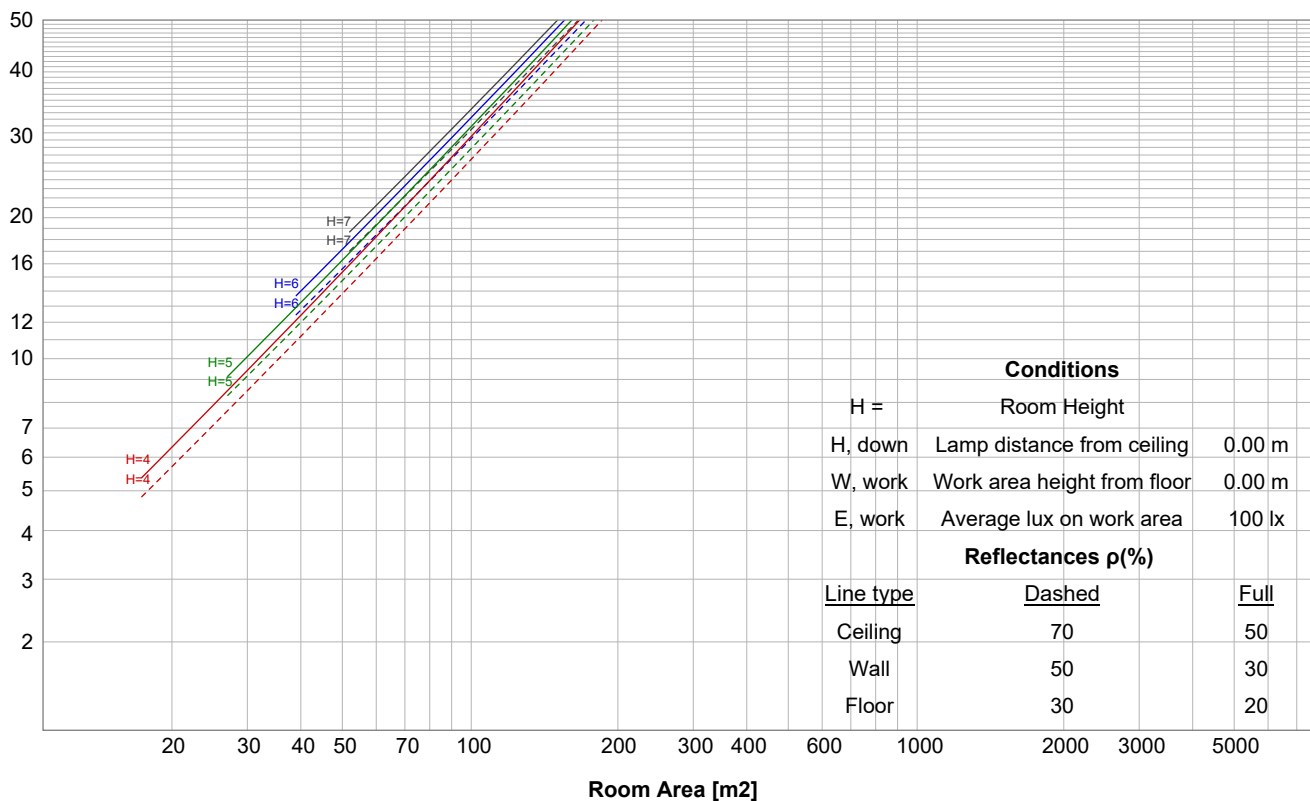


Iso-intensity Diagram (Iso-candela)

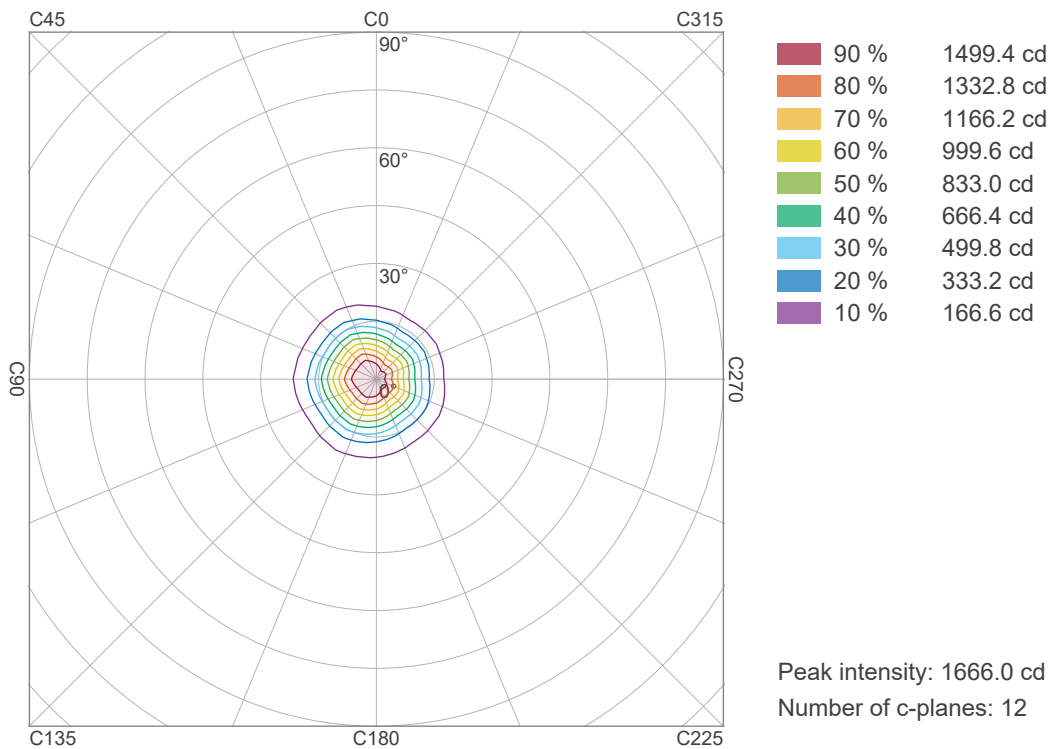

Iso-illuminance Diagram (Iso-lux)

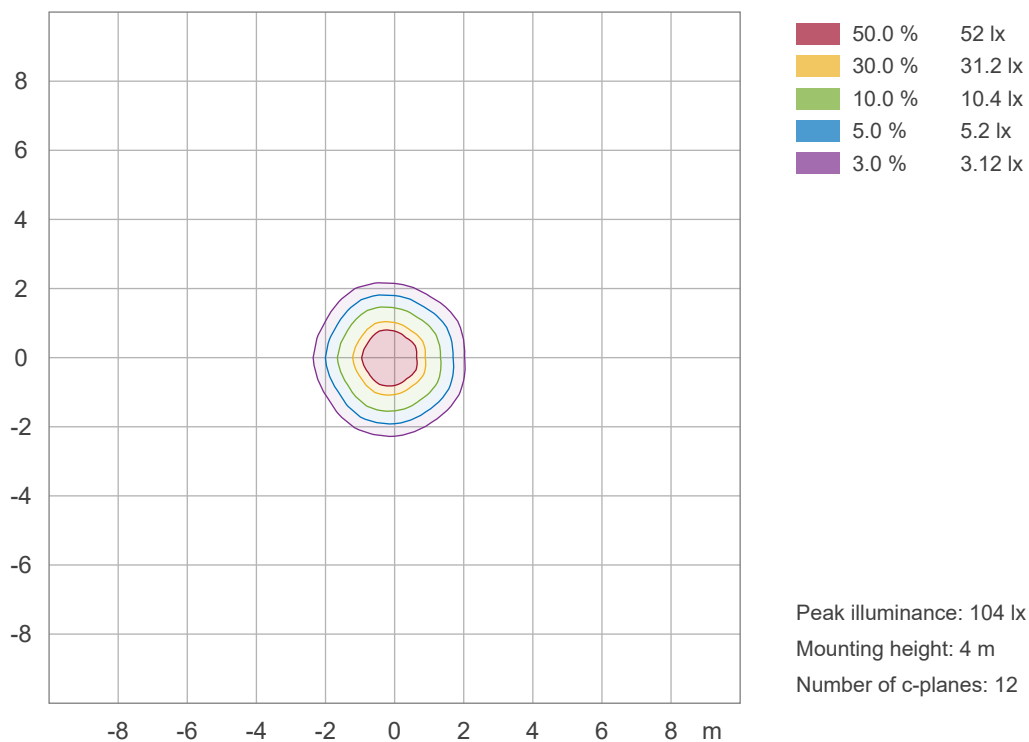


Linear intensity distribution diagram

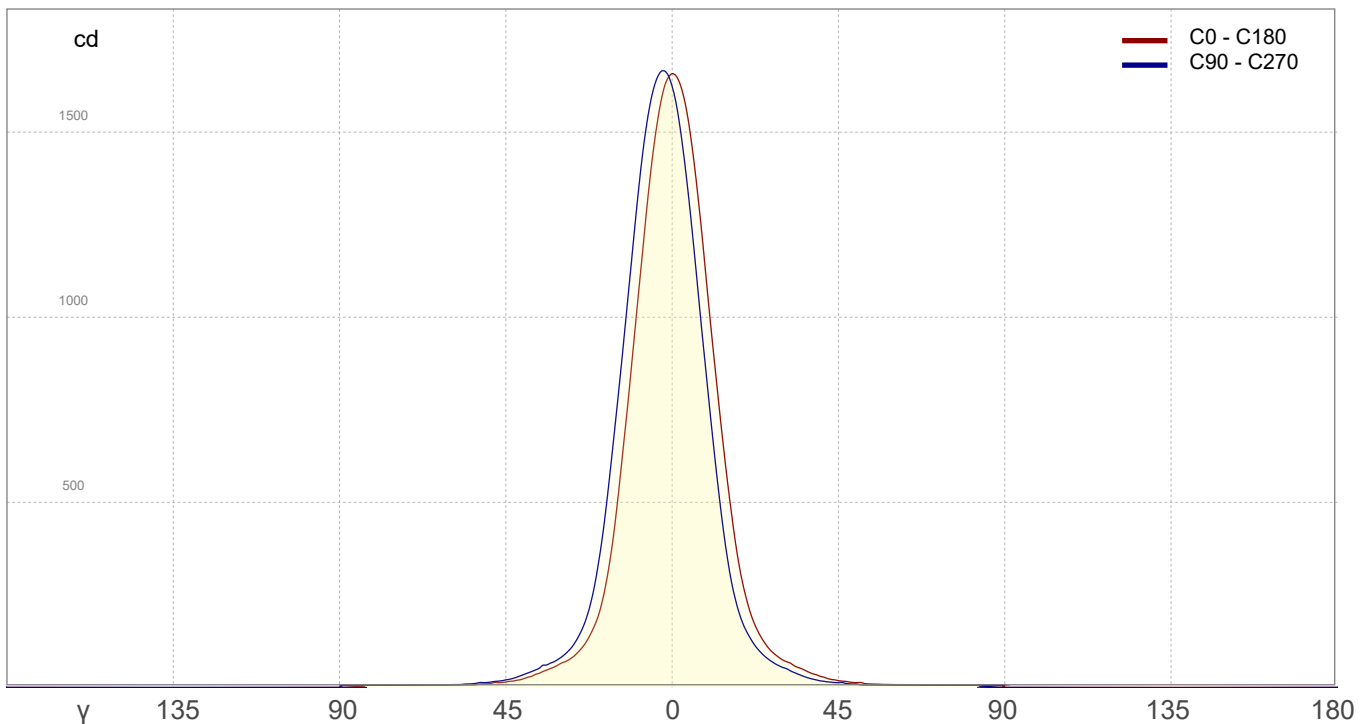

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U0 G0

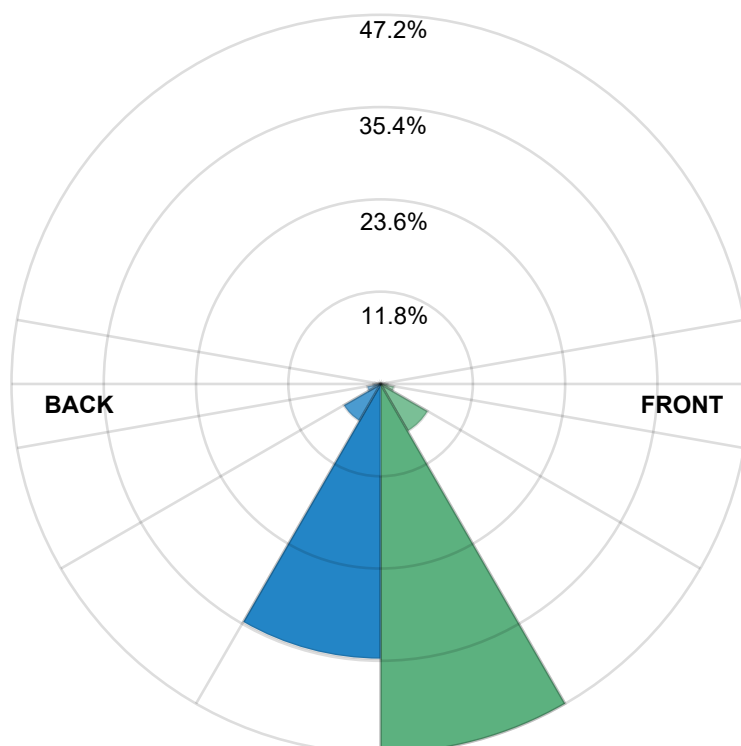

Forward Light

Low (0-30°)	186.4 lm	47.2%
Medium (30-60°)	27.4 lm	7.0%
High (60-80°)	6.9 lm	1.7%
Very High (80-90°)	3.4 lm	0.9%

Back Light

Low (0-30°)	138.7 lm	35.2%
Medium (30-60°)	21.4 lm	5.4%
High (60-80°)	6.8 lm	1.7%
Very High (80-90°)	3.6 lm	0.9%

Uplight

Low (90-100°)	0.0 lm	0.00%
High (100-180°)	0.0 lm	0.0%

Total

Sum	394.5 lm	100,0%
-----	----------	--------