

LED STRIP SPECIFICATION

5050SMD 72LEDs RGB LED STRIP











Part Number: MON72-S5050RGB-W24-IP20 IP20/IP52/IP65H/IP65/IP67/IP67E/IP68



Description

24V, flexible LED strip (6LED/step=83.4mm) with 3M adhesive tape on the back for easy installed.

17.28W/m. 120° beam angle, high light quality at a lifetime of 54,000 hours (L_{70}). Double-layer FPC(2Oz) for good heat dissipation.










Dimensions & Waterproof

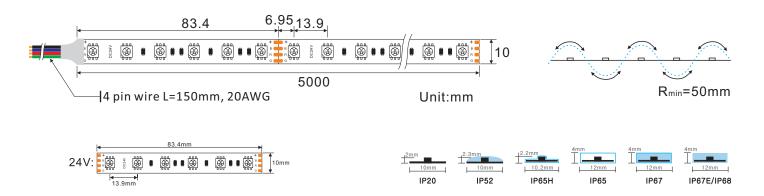

Product Specification

Dimension	5000x10x2mm
Chip Type	5050SMD
Chip Density	72LEDs/m
Step LEDs	6LEDs
Step Length	83.4mm

Voltage(V)	DC24V
Current(A/m)	0.72A
Power(W/m)	17.28W(3 colors 100% on)
Beam Angle	120°
Operation Temperature	-20°C~50°C

Product Photometrics - Red, Green and Blue Diodes (Data base on IP20)


Color	Peak Wavelength	Dominant Wavelength	Lumen (Im/m)	Power (w/m)	Efficacy (Im/w)
Red	632	622	152.57	5.55	27.49
Green	517	523	499.19	6.05	82.51
Blue	462	466	92.91	5.70	16.30



Product Photometrics - All Red, Green and Blue color at 100% on (Data base on IP20)

CCT (K)	Lumen (Im/m)	Power (w/m)	Efficacy (Im/w)	CRI	R9
42300K	744.6	17.28	43.09	50	-

Bining

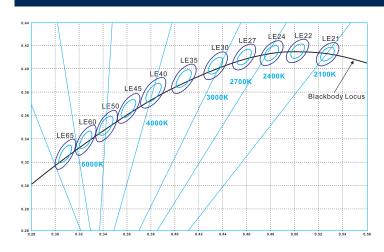



 $\textbf{IP20:} \ bare, \, \mathsf{max.} \ \mathsf{light} \ \mathsf{output} \ \mathsf{and} \ \mathsf{the} \ \mathsf{best} \ \mathsf{color} \ \mathsf{consistency}, \, \mathsf{indoor} \ \mathsf{use}.$

IP52: Silicone coating, ~5% less output and 3rd best color consistency, indoor use, for damp environments.

IP65: Silicon tube / Heat shrink tube / Extrusion tube / U milky tube + clear cover, ~3% less output and 2nd best color consistency, Indoor use or semi-outdoor use, for raining environments.

IP67: Silicone tube + silicon filling , ~7% less output and 4th best color consistency, outdoor use, max length is 10 meters.

 $\textbf{IP67E:} Solid silicone extrusion, \verb|~~7\%| less output and 4th best color consistency, outdoor use, max length up the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency outdoor use. The color consistency is a silicone extrusion of the color consistency of the color consistency of the color col$

to 50 meters.

IP68: PU(Polyurethane),~7% less output and 4th best color consistency, under the water, within 2 meters deep.

Packing Information(Data base on IP20)

